Distinguished Lecturer Program

Primary funding is provided by

The SPE Foundation through member donations and a contribution from Offshore Europe

The Society is grateful to those companies that allow their professionals to serve as lecturers

Additional support provided by AIME

Society of Petroleum Engineers
Distinguished Lecturer Program
www.spe.org/dl

Unconventional Frac Jobs for Unconventional Reservoirs – What Should You Be Concerned About?

Jennifer L. Miskimins, Ph.D., P.E.
Barree & Associates

Society of Petroleum Engineers
Distinguished Lecturer Program
www.spe.org/dl

Outline of today's presentation...

- Purpose
- Unconventional reservoirs
- Fluids and proppants
- Conductivity and clean-up
- Proppant transport
- Modeling
- Hydraulic fracturing for reservoir management
- Conclusions

WHY should you be concerned?

- Unconventional reservoirs (UCR's) are just that - unconventional
- UCR's are increasing forming our reserve/resource base around the world
- Extrapolation of conventional techniques and concepts to UCR's is risky
  - Combination of considerations

Conventional vs. Unconventional

"Unconventional resources…accumulations that are pervasive throughout a large area…not significantly affected by hydrodynamic influences…require specialized extraction technology…"

SPE-PRMS, 2007

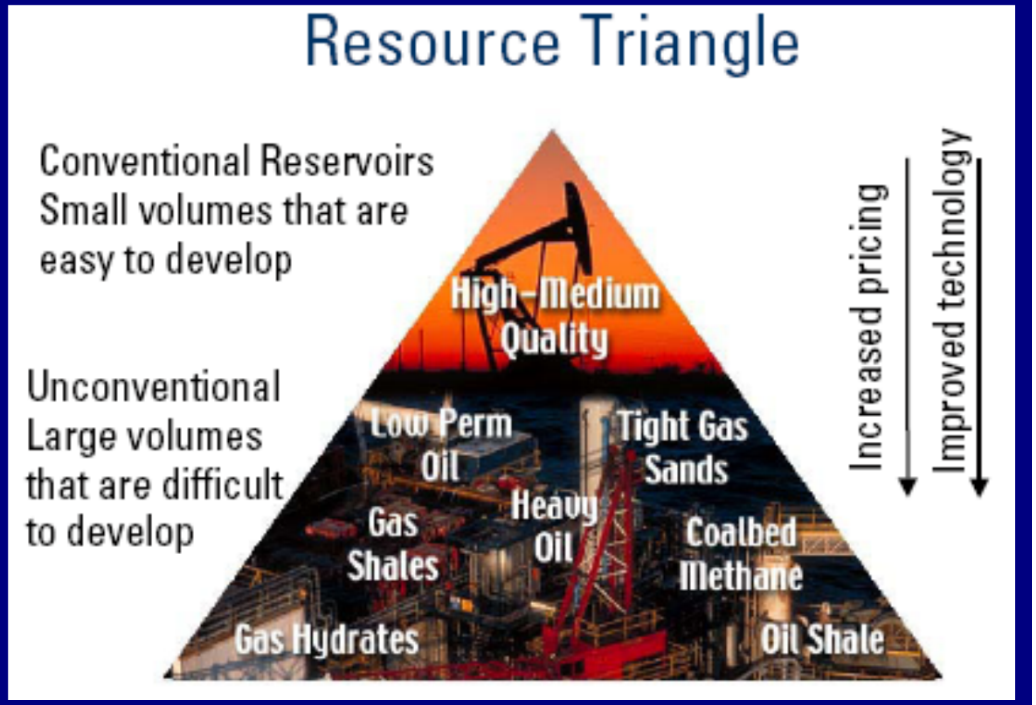

Holditch, 2001

Today's presentation focuses on…

- Shale gas (is a "shale" a "shale"?)
  - Micro/nano-Darcy permeability (10^{-6} – 10^{-9})
  - High quartz or carbonate content (typically less than 20-30% clays)
  - High TOC?
- Shale ("liquids rich") oil
- Tight gas
  - What is "tight"?
  - Micro-Darcy permeability
  - Fluvial, laterally discontinuous bodies; blanket sands

Fluid Systems

- "Slickwater"
  - Minimal polymer loading
  - Polyacrylamide friction reducers
  - 1 – 10 cp fluid system
  - Carrying capacity reduced
- Lighter loaded systems
- Must minimize damage due to the initial low permeability

$$F_{CD} = \frac{k_f w}{k X_f}$$

Courtesy of Stimlab

Lightweight/Smaller Proppants

- Use of lower viscosity fluids = difficult to carry high proppant concentrations
- *Velocity* is the transport mechanism, not *viscosity*
- Function of fracture width, Reynolds numbers, densities of proppants and fluids, diameters of proppants
- 100 mesh, 30/50, and 40/70 sizes common

Conductivity and Clean-up

- Fracture conductivity is still critical!!
- Pack width determined by
  - Proppant concentration
  - Closure stress
  - Filter-cake and embedment
- Pack permeability determined by
  - Proppant size and strength
  - Packing and porosity
  - Regained permeability and gel clean-up
  - Non-Darcy and multiphase flow

Cleanup and Load Recovery is Affected by Gravity, Viscous, and Capillary Forces

Flow downward, co-current at any rate, assisted by gravity. Lower Sw, better recovery and gas perm.

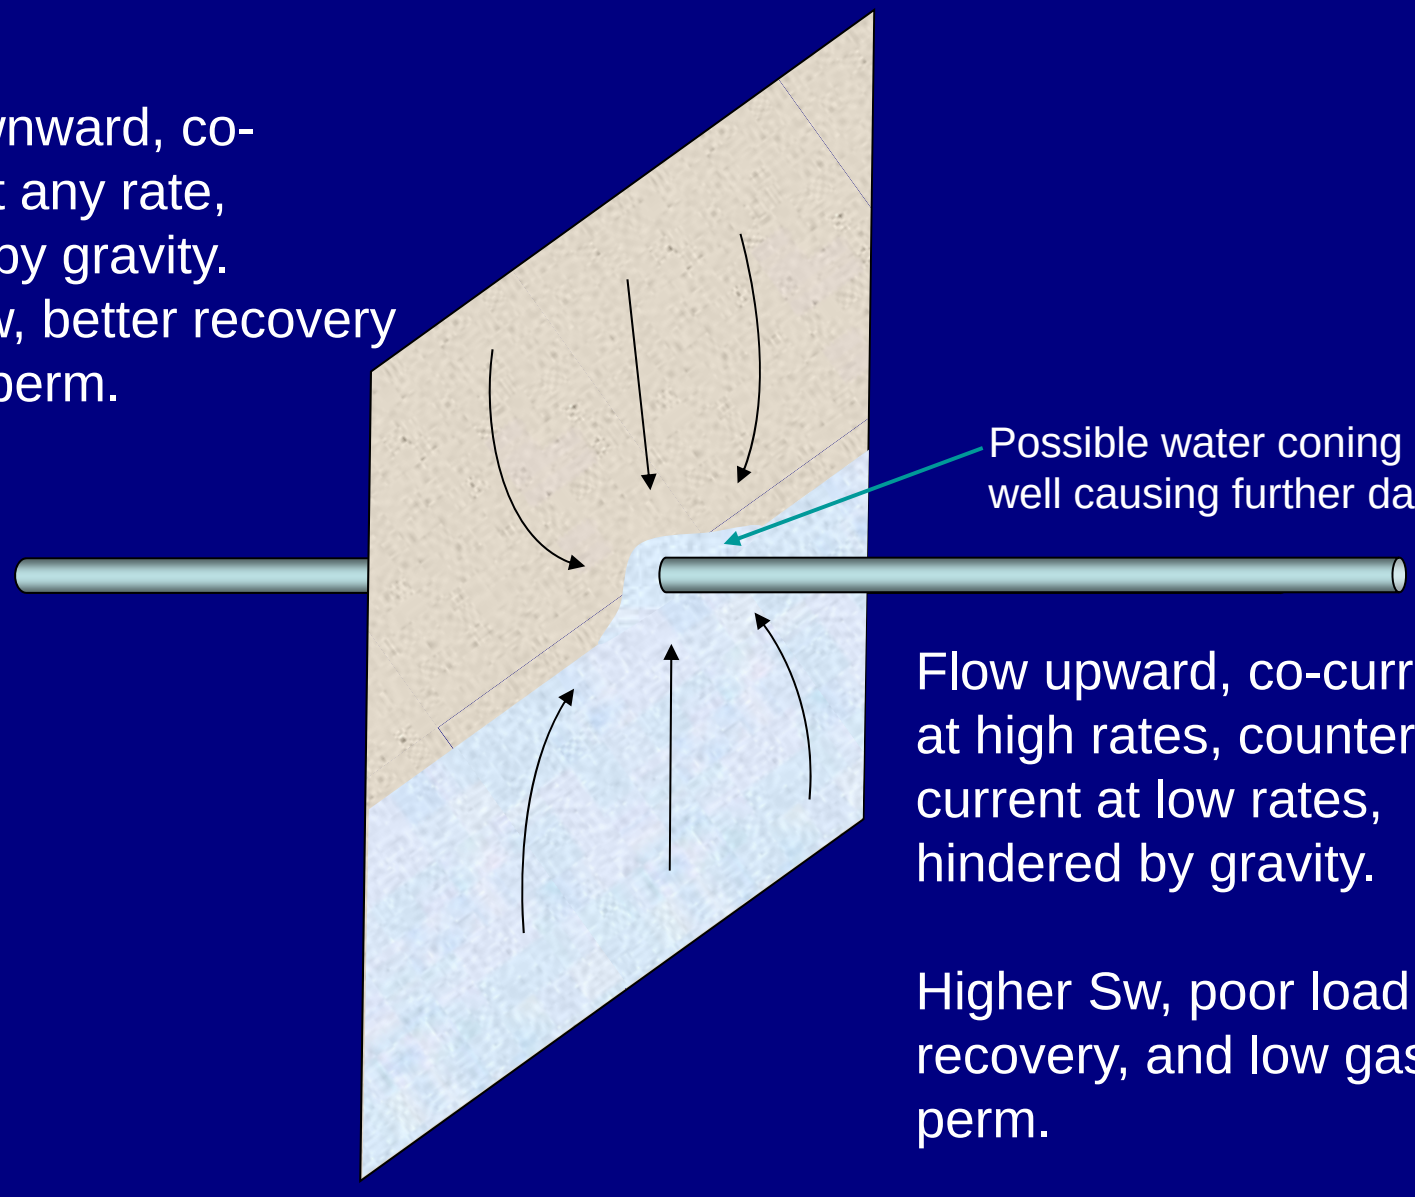

Flow upward, co-current at high rates, counter-current at low rates, hindered by gravity.

Higher Sw, poor load recovery, and low gas perm.

Traditional Prop Transport

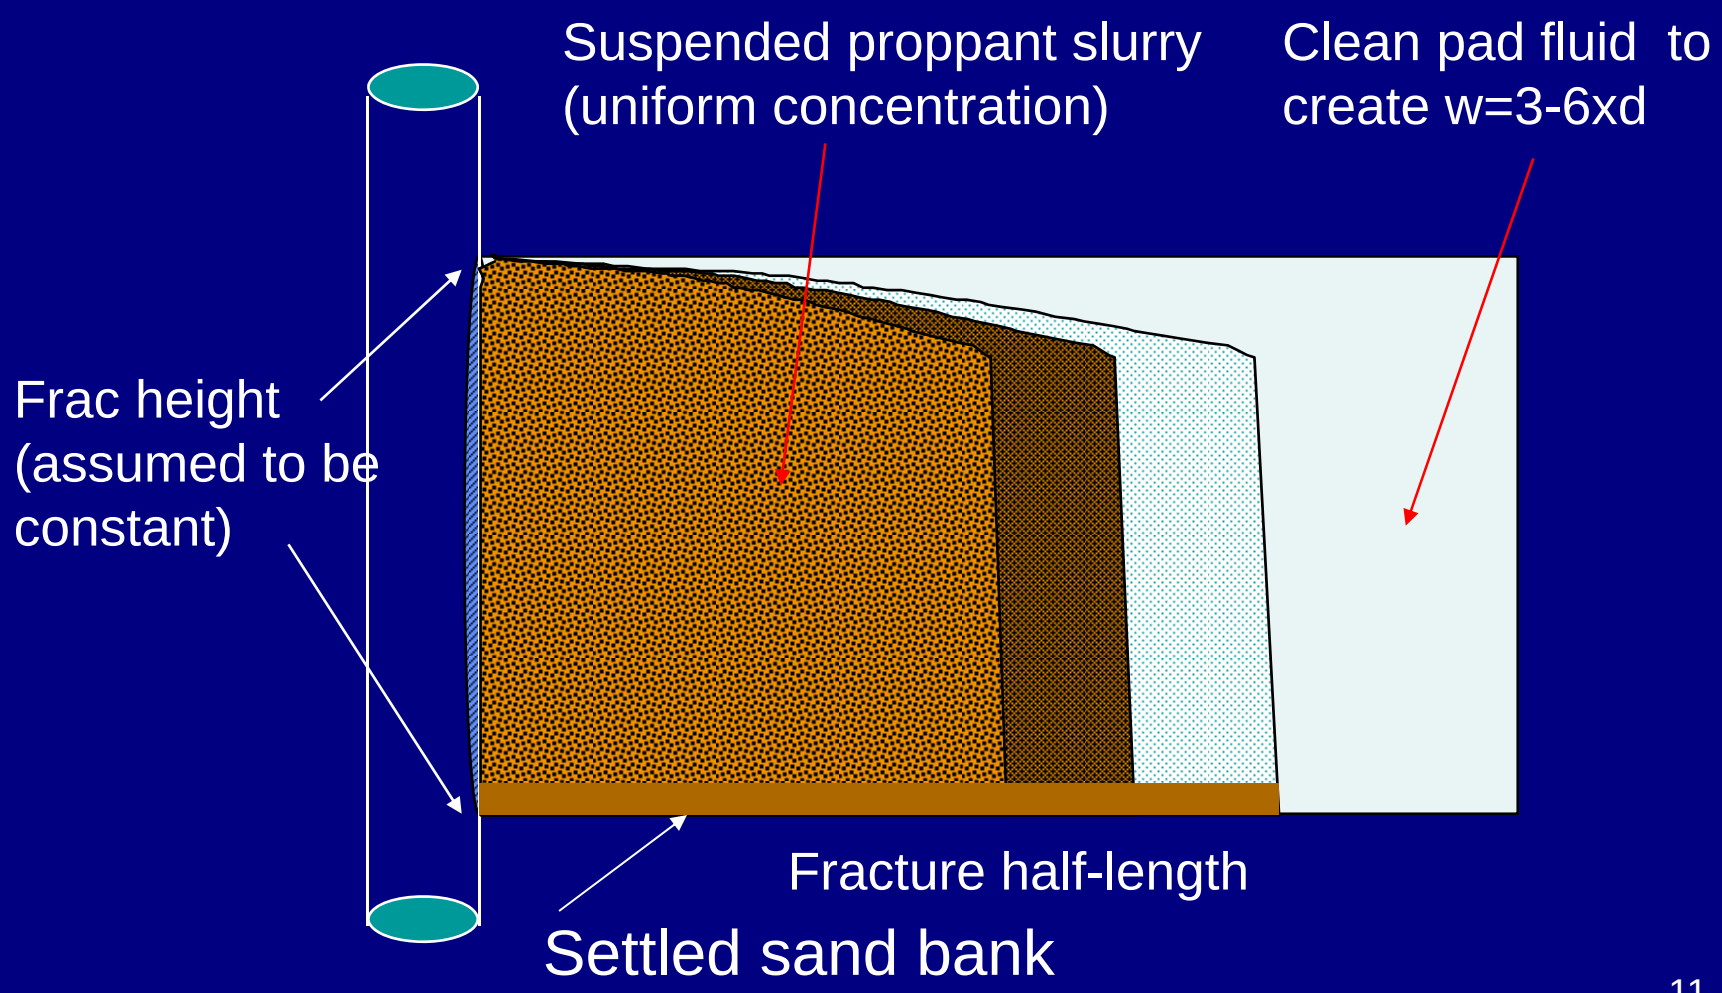

Particle Transport

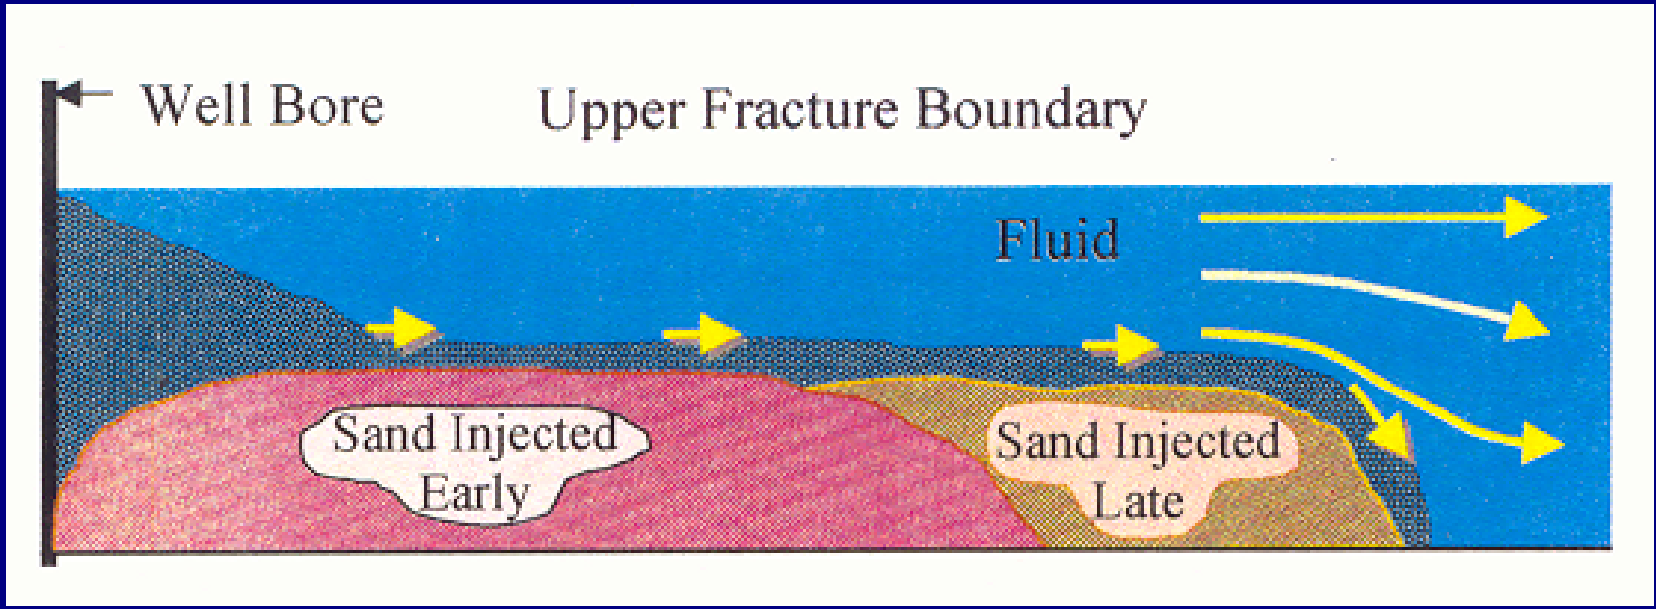

(From Patankar, 2002 and Kern, Perkins, and Wyant, 1959)

Example 1 – Bank Placement

0:08 sec

0:35 sec

0:58 sec

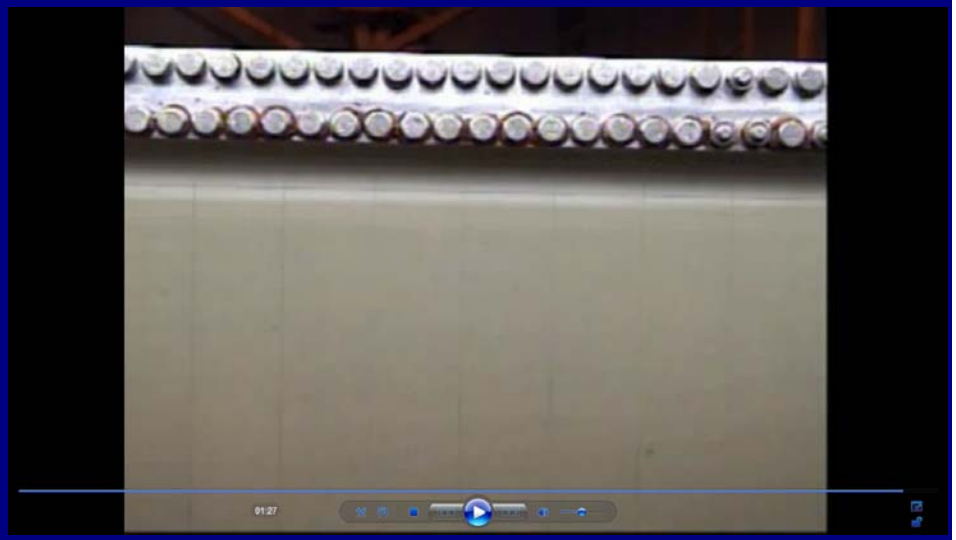

1:26 sec

Courtesy of Stimlab

Example 2 – Erosion of Bank

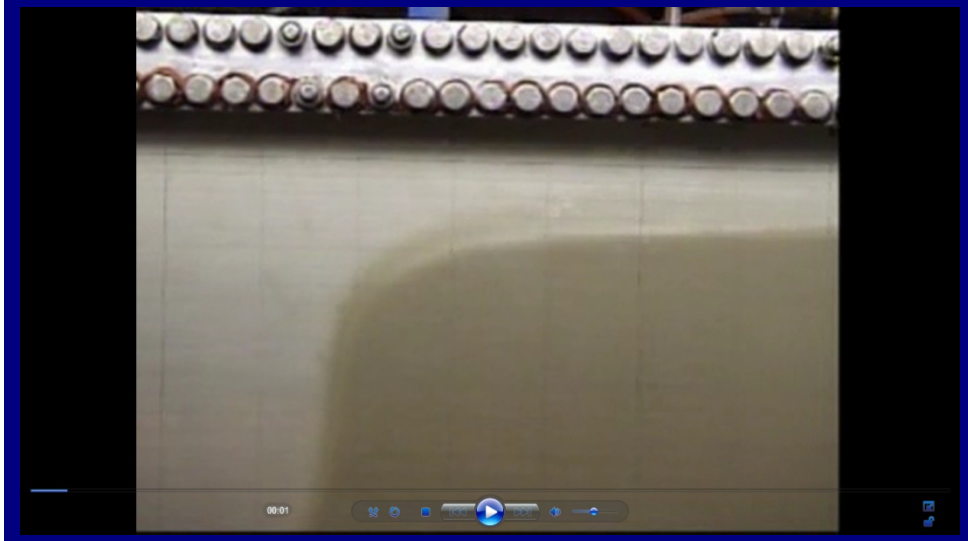

0:01 sec

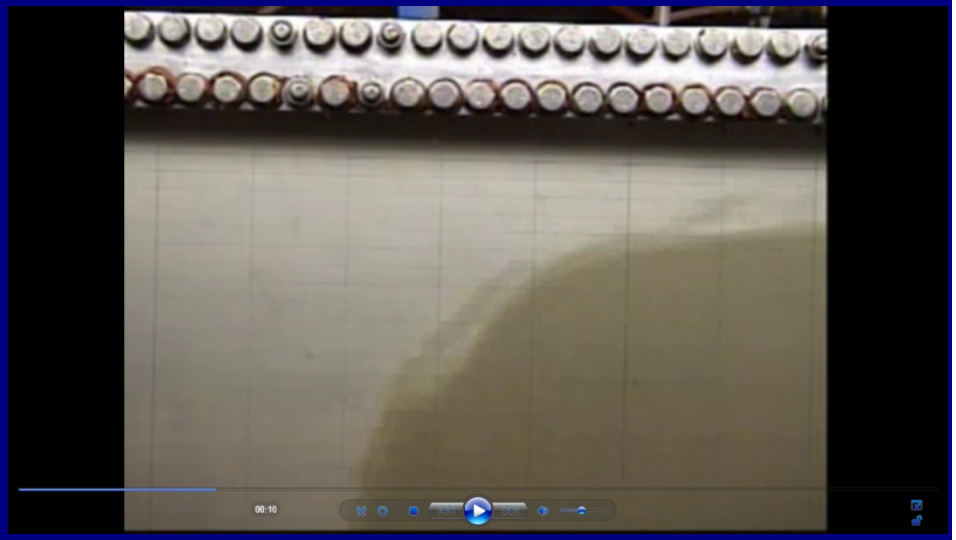

0:10 sec

0:38 sec

0:50 sec

Courtesy of Stimlab

Modeling

- Remember that fracturing is always the *path of least resistance*
- De-coupling; vertical resistance (layers; laminations)
- Breakdown considerations in horizontal wells

Containment by Shear Decoupling

Coupled System

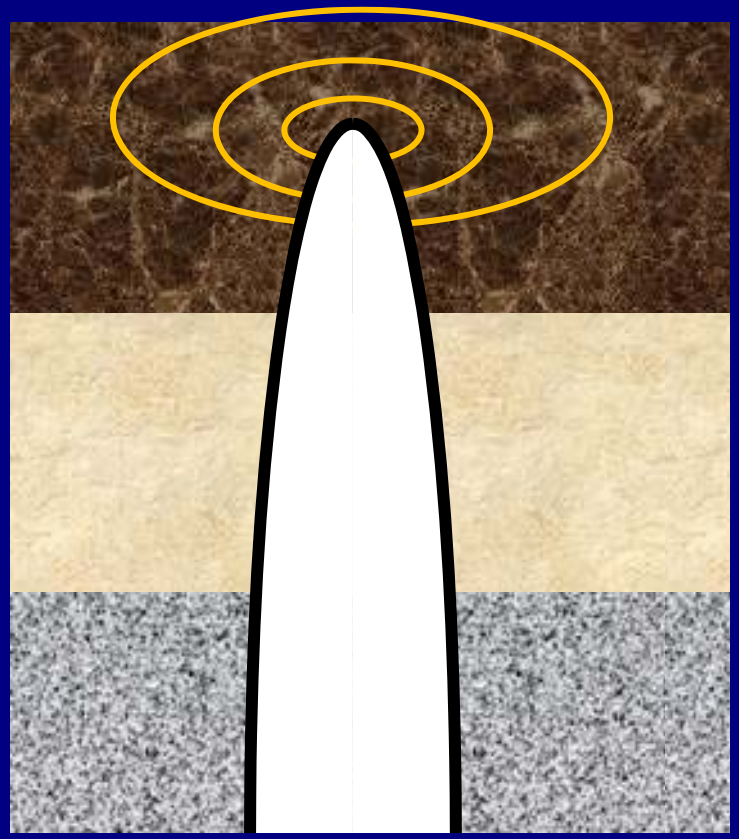

Decoupled System

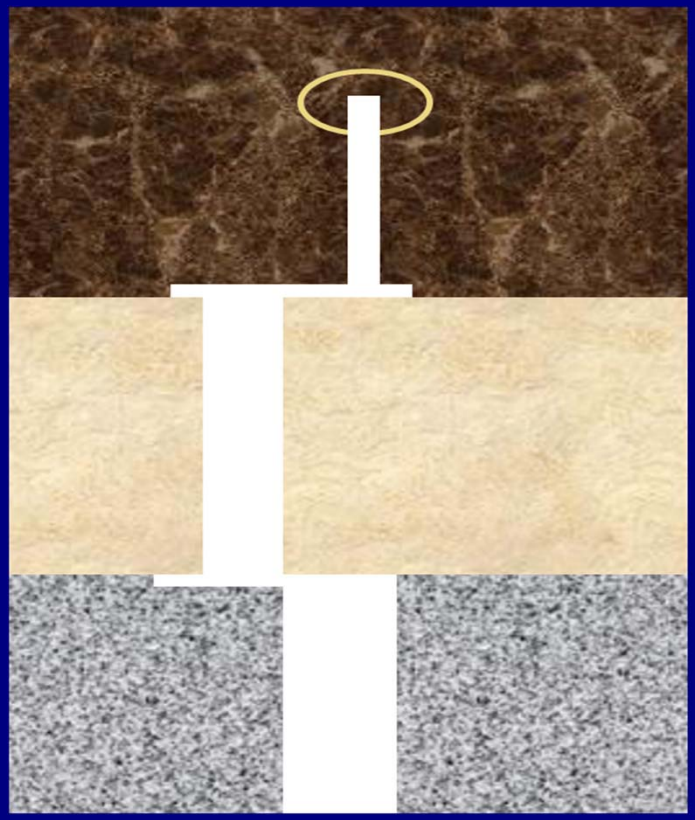

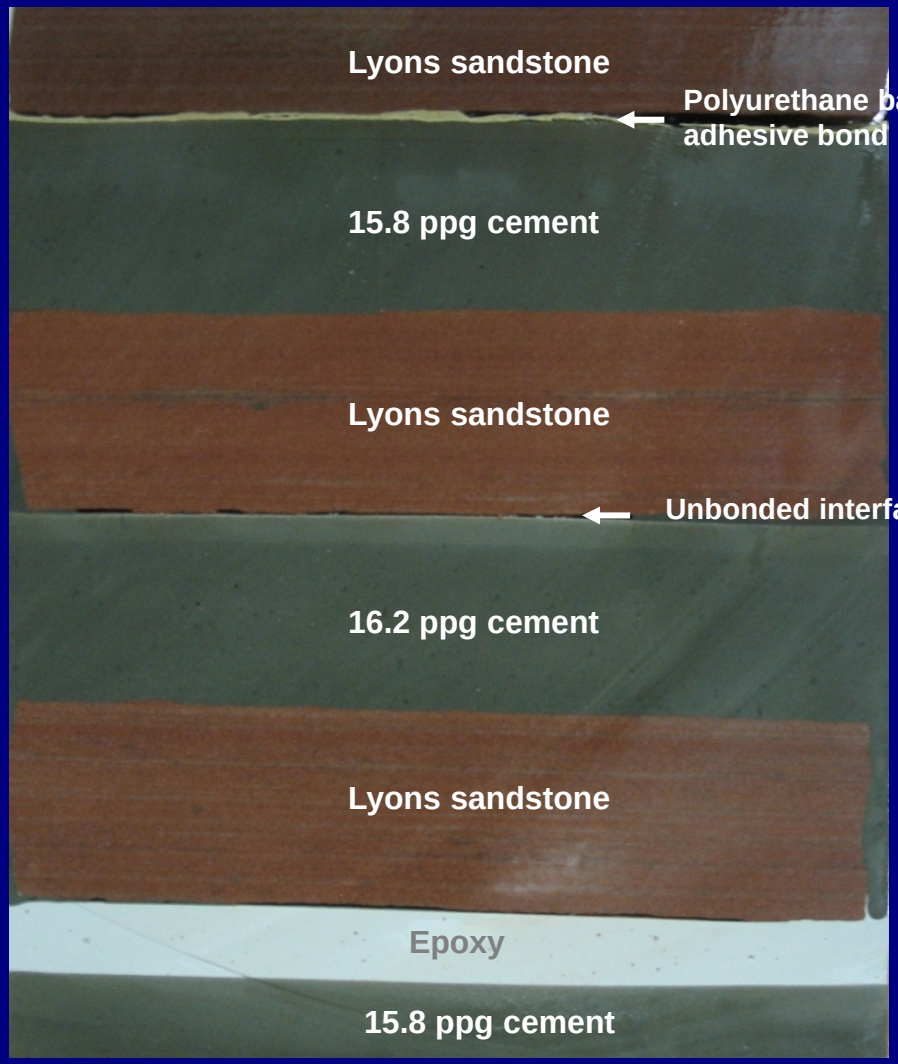

Laboratory experiments – laminated block before hydraulic fracturing (28 cm X 28 cm X 48 cm)

After hydraulic fracturing – notice the complexity for this “simple” system

Athavale and Miskimins, 2008

Near-Well Stresses In Rotated 3D Space

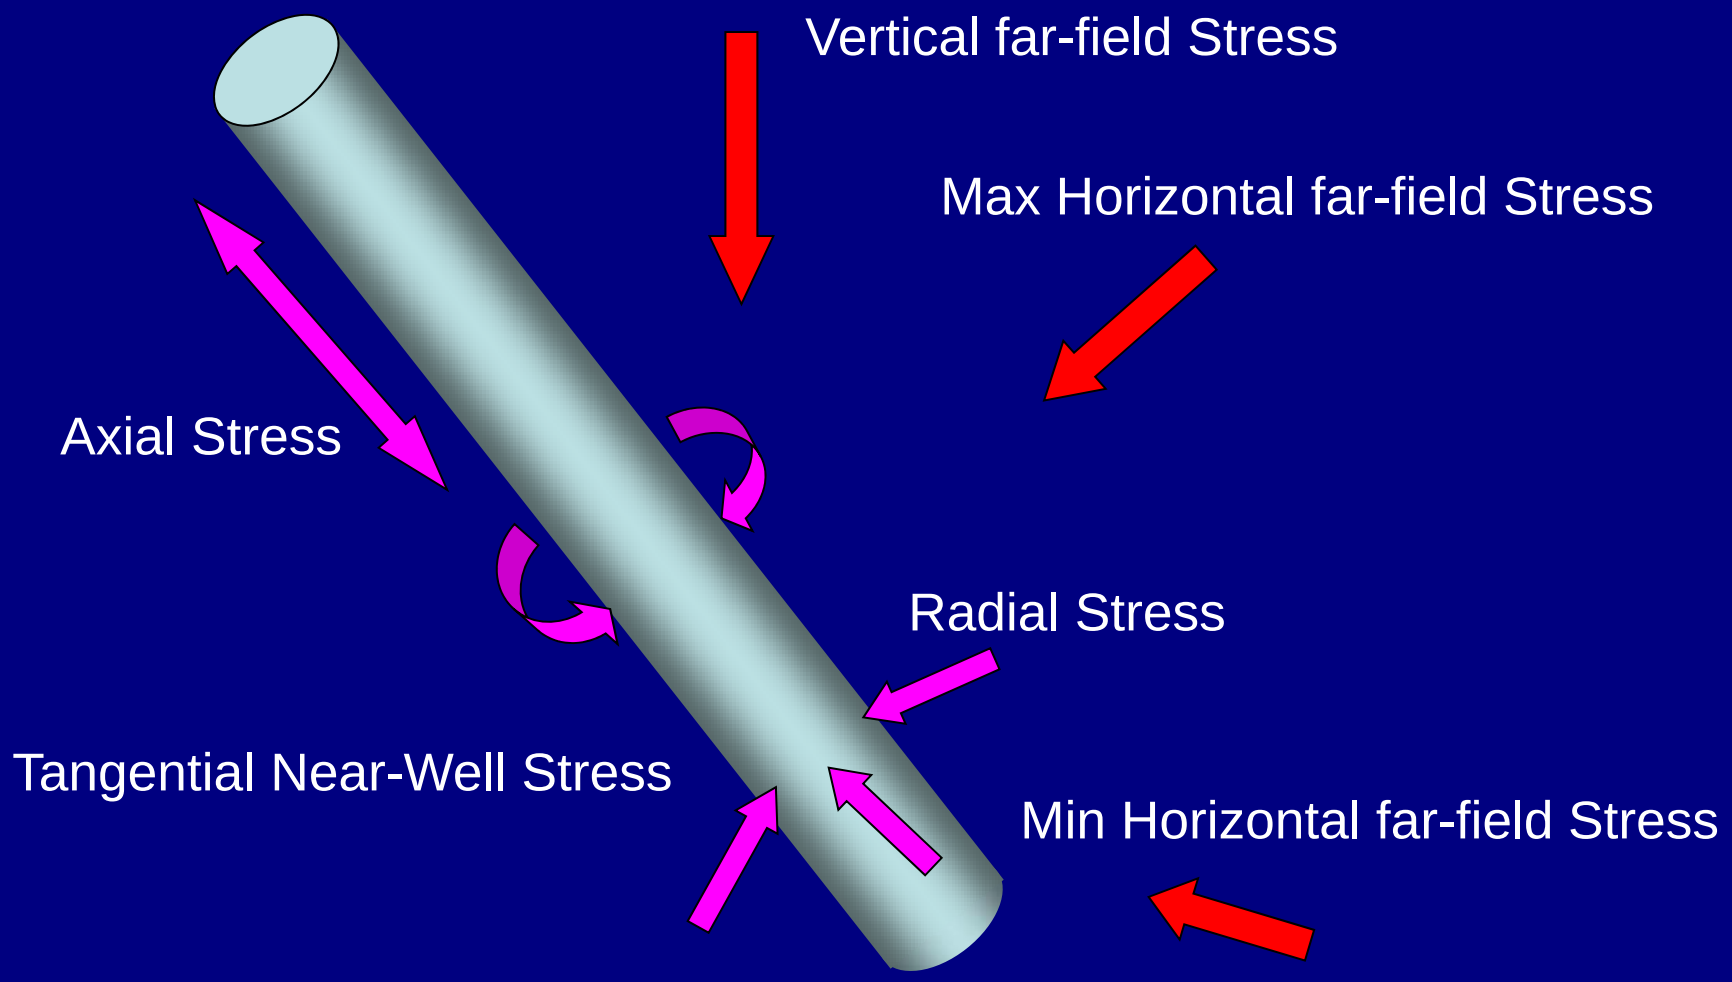

Tangential Stress Distribution Around a Horizontal Well

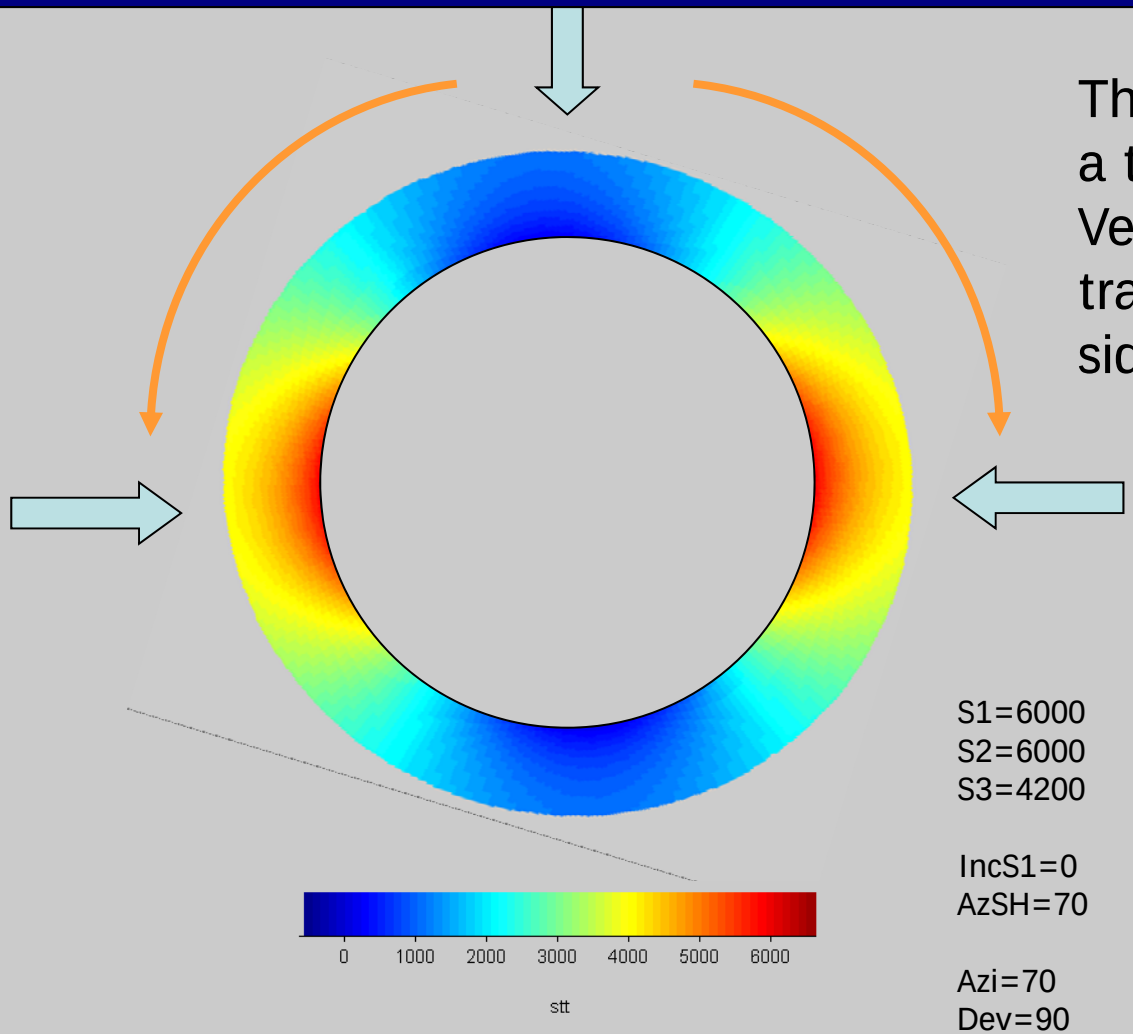

The wellbore acts as a tunnel arch: Vertical stress is transmitted to the sides of the hole

S1=6000
S2=6000
S3=4200

IncS1=0
AzSH=70

Azi=70
Dev=90

Breakdown Example

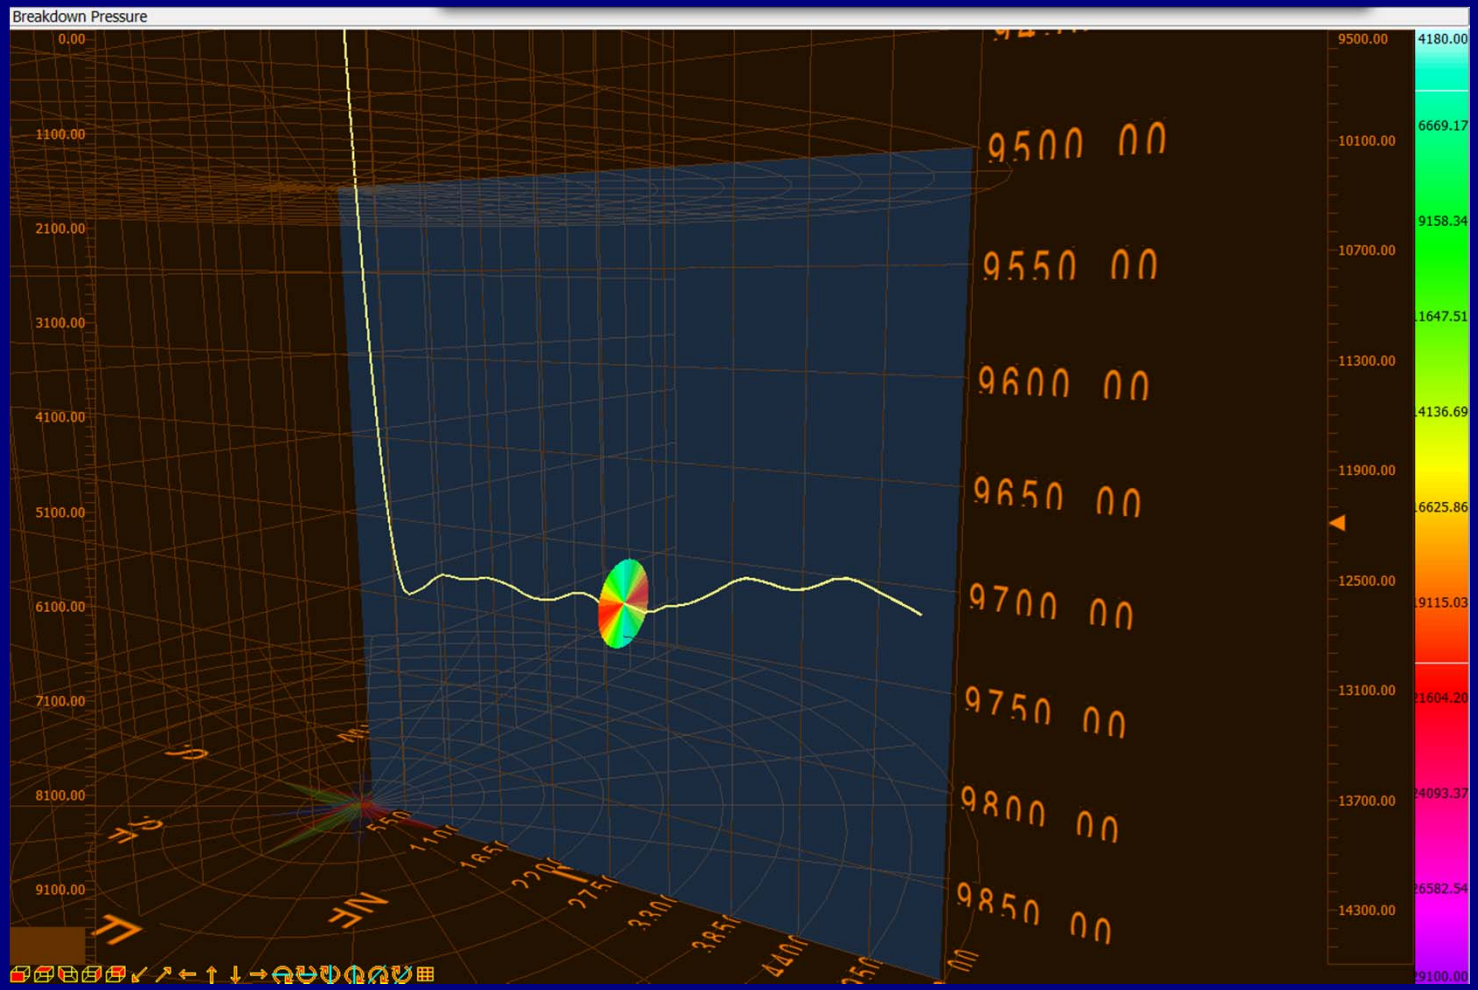

Reservoir Management/Development

- Reservoir characterization
- Well spacing
  - 10-20 acres (4-8 hectares)
- Stage/cluster spacing
- Need to maximize contact area
  - Low permeability
  - Minimal drainage area
- Re-treatments

Reservoir Characterization

- Diagnostic injection tests
  - Leak-off behavior
  - Presence of natural fractures
  - Reservoir pressure
  - Permeability
  - Process zone stresses

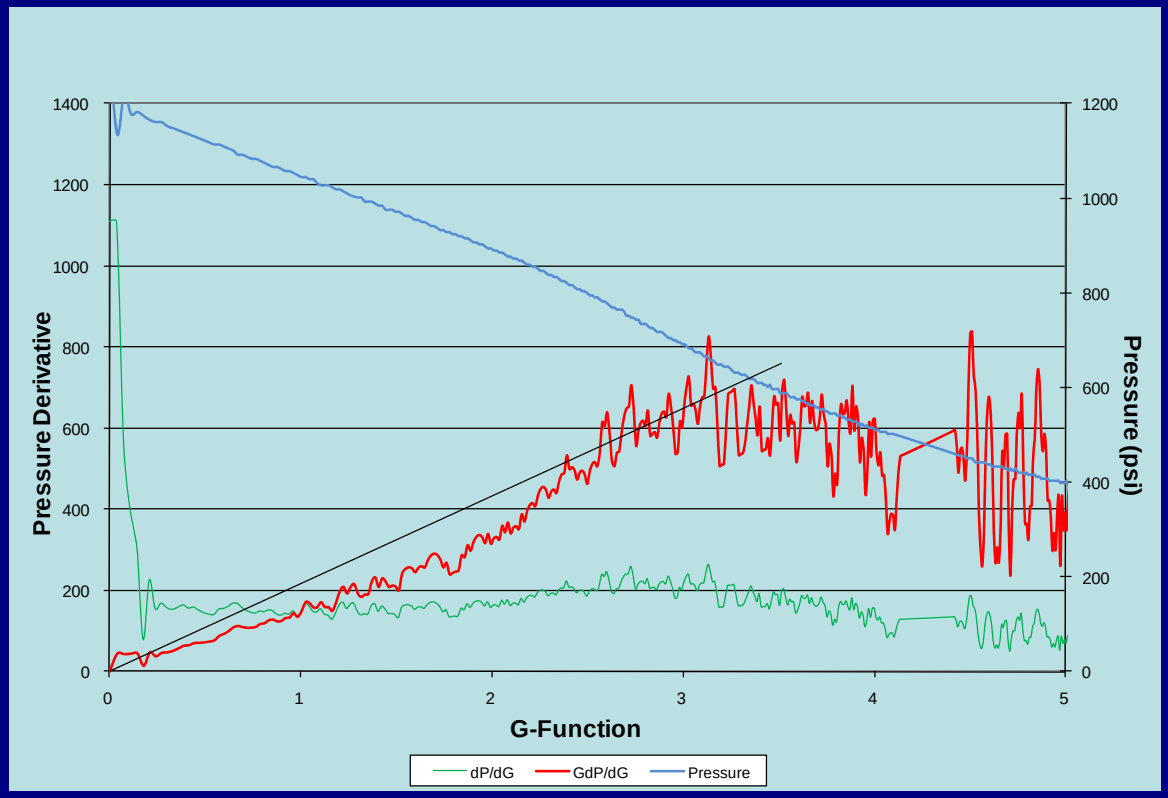

G-Function Analysis

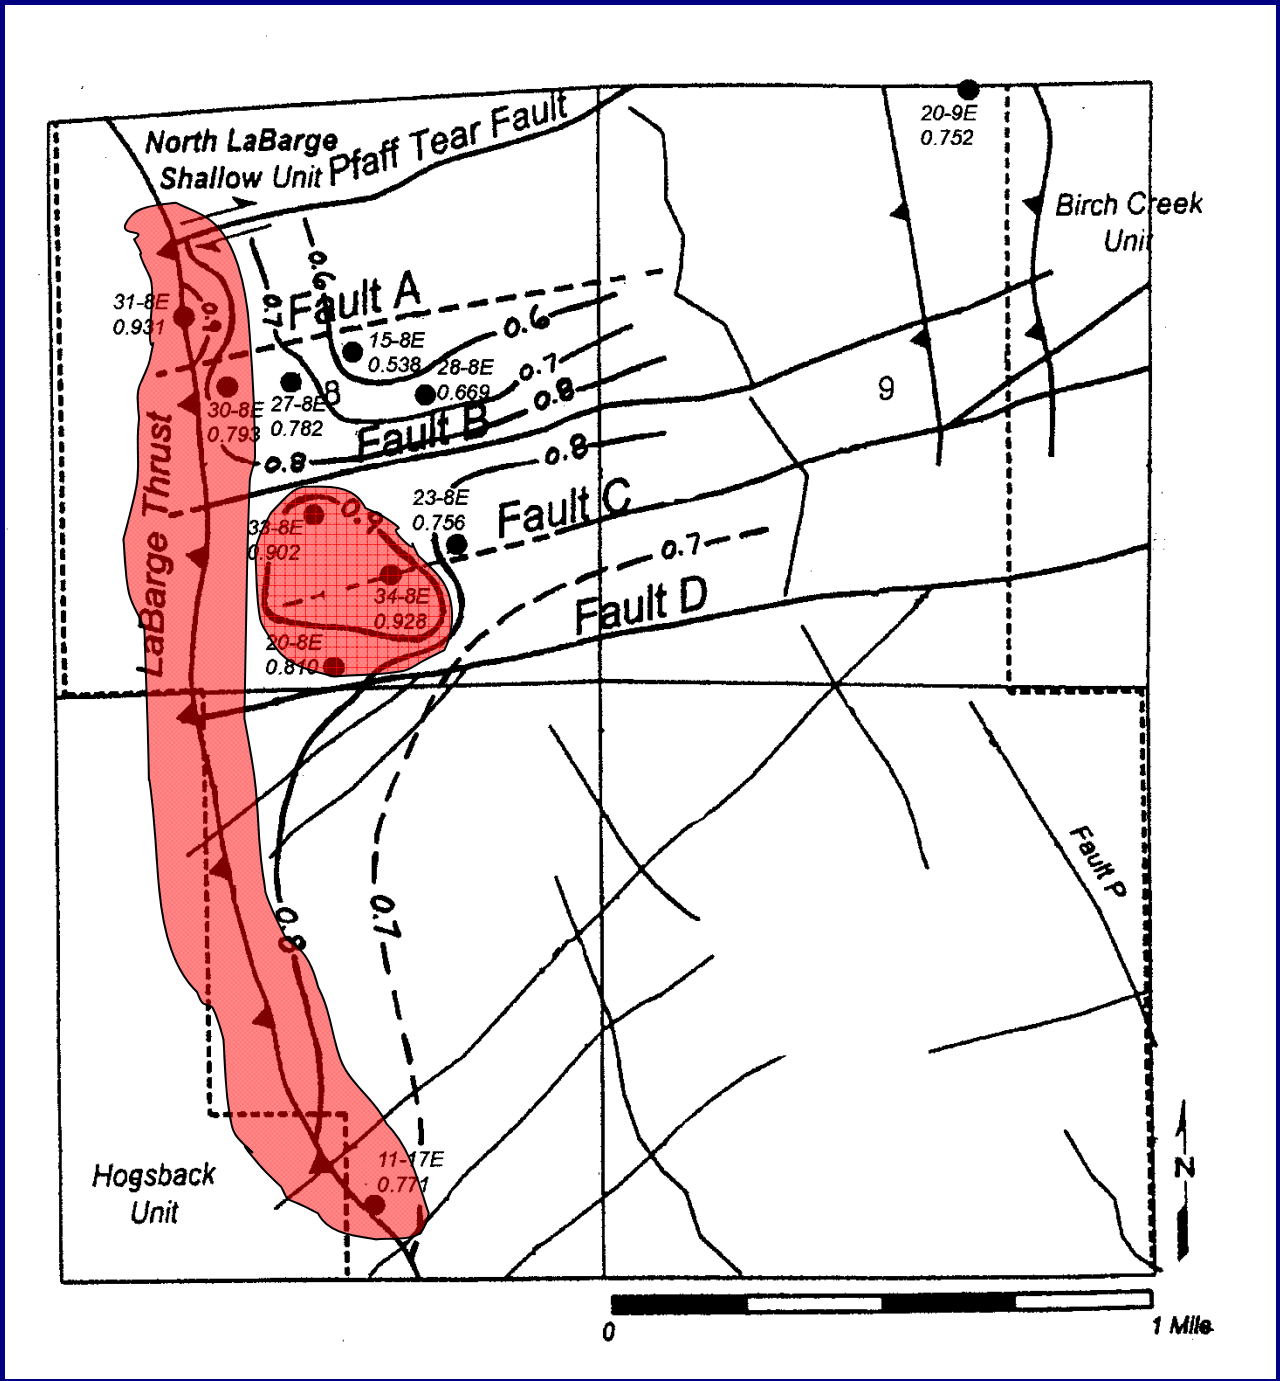

C.I. = 0.1 psi/ft

Miskimins, 2000

DFIT Procedure

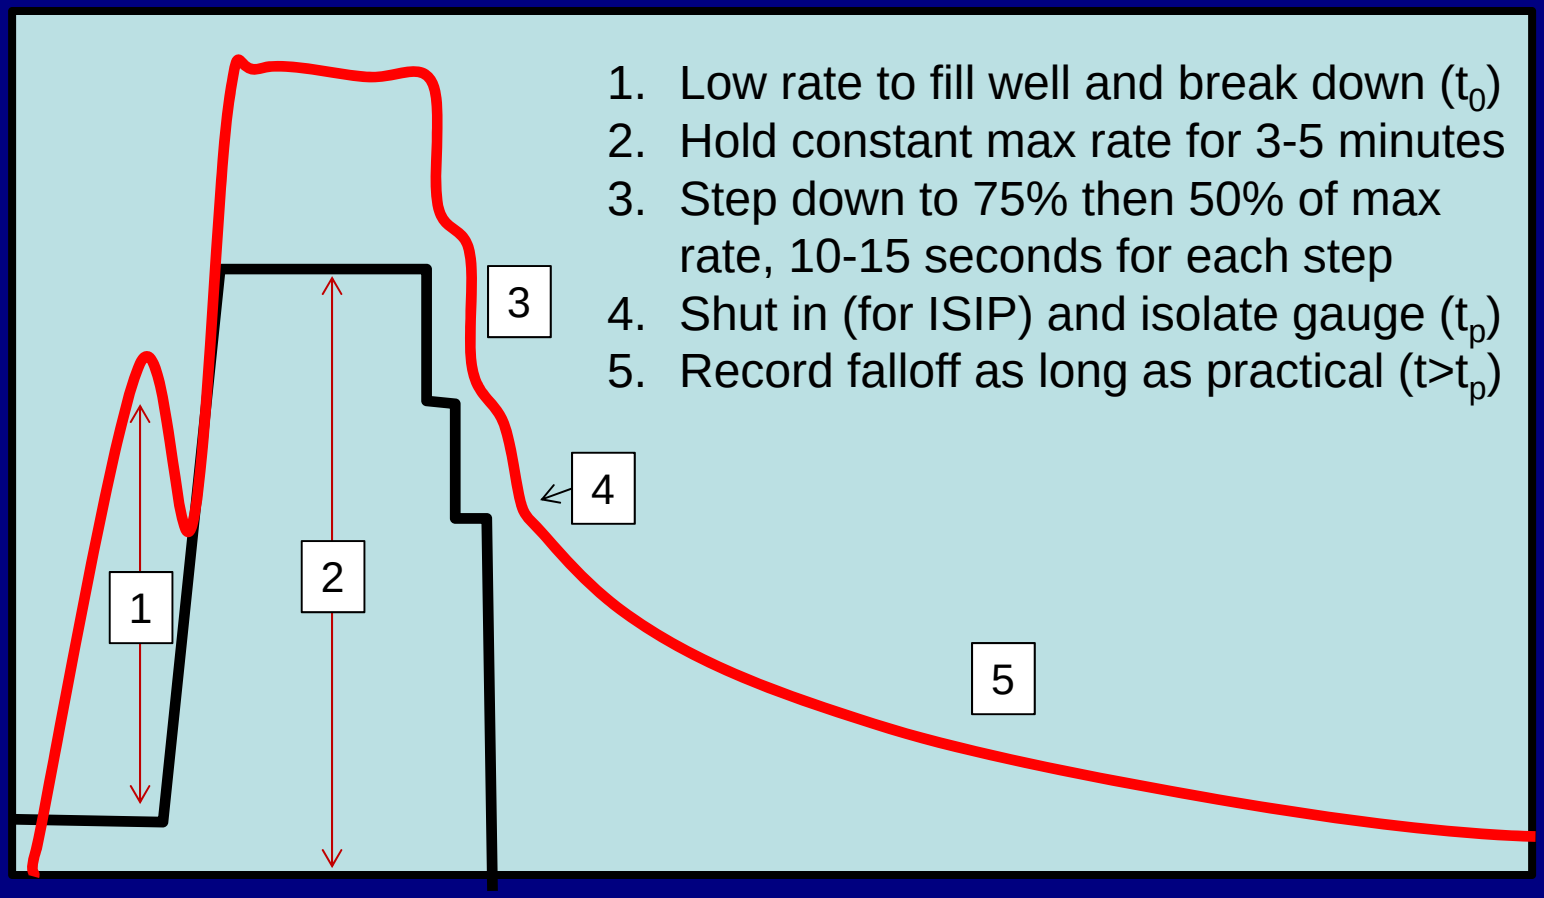

1. Low rate to fill well and break down (t_0)
2. Hold constant max rate for 3-5 minutes
3. Step down to 75% then 50% of max rate, 10-15 seconds for each step
4. Shut in (for ISIP) and isolate gauge (t_p)
5. Record falloff as long as practical ($t>t_p$)

Barree, et al., 2014

Reservoir Management/Development

- Reservoir characterization
- Well spacing
  - 10-20 acres (4-8 hectares)
- Stage/cluster spacing
- Need to maximize contact area
  - Low permeability
  - Minimal drainage area
- Re-treatments

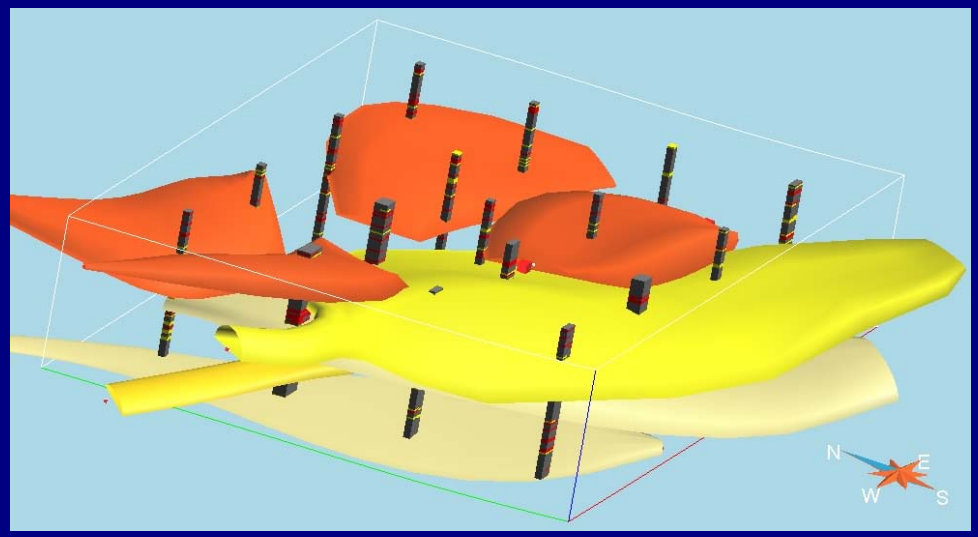

10-ac spacing 3D view of wellbore penetrating fluvial bodies

Body types penetrated as a function of well-spacing densities

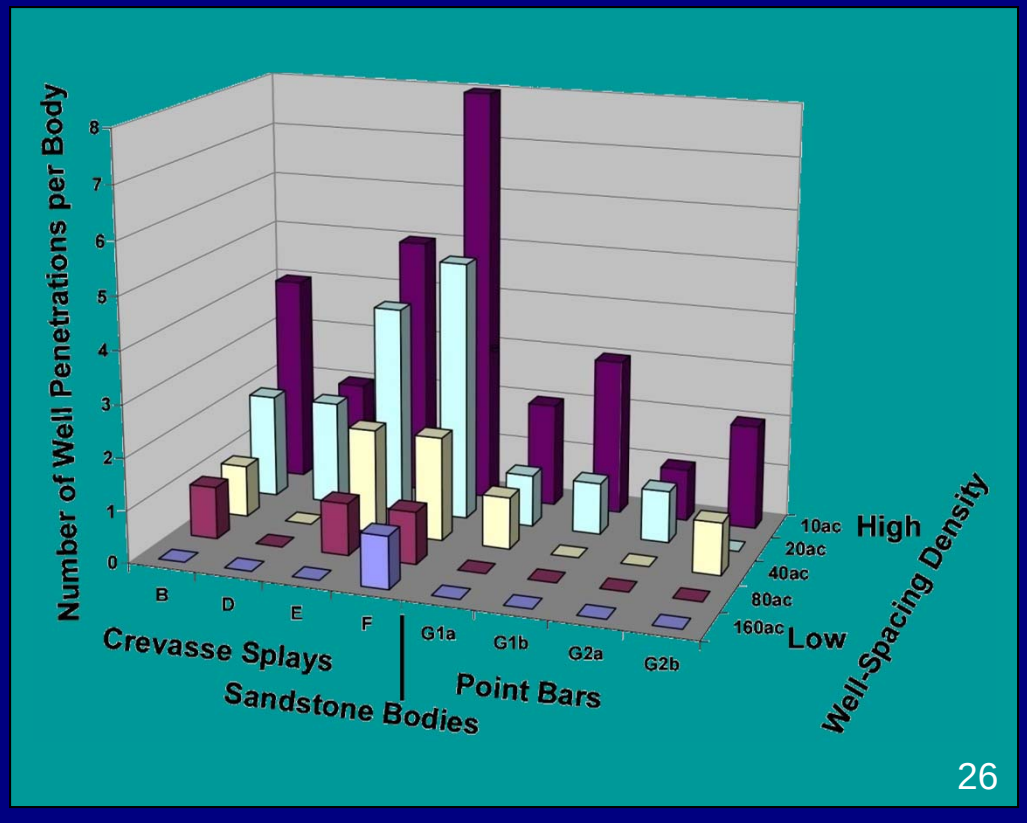

Modified from Anderson, 2004

“Layer-cake” Reservoir

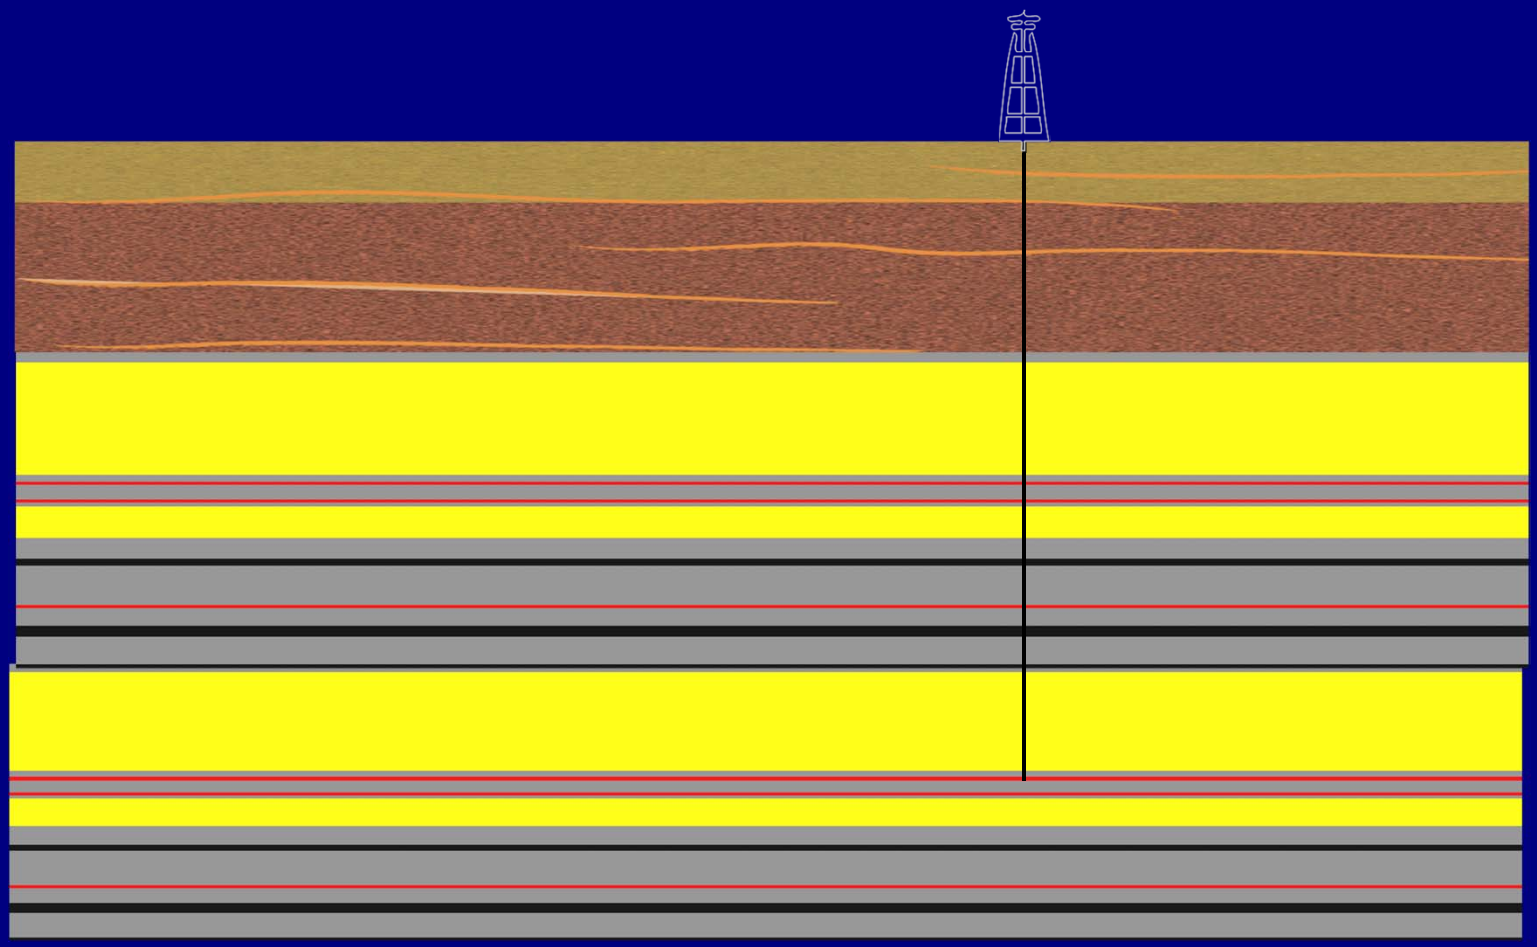

From Cuba, et al, 2013

“Layer-cake” Model Results

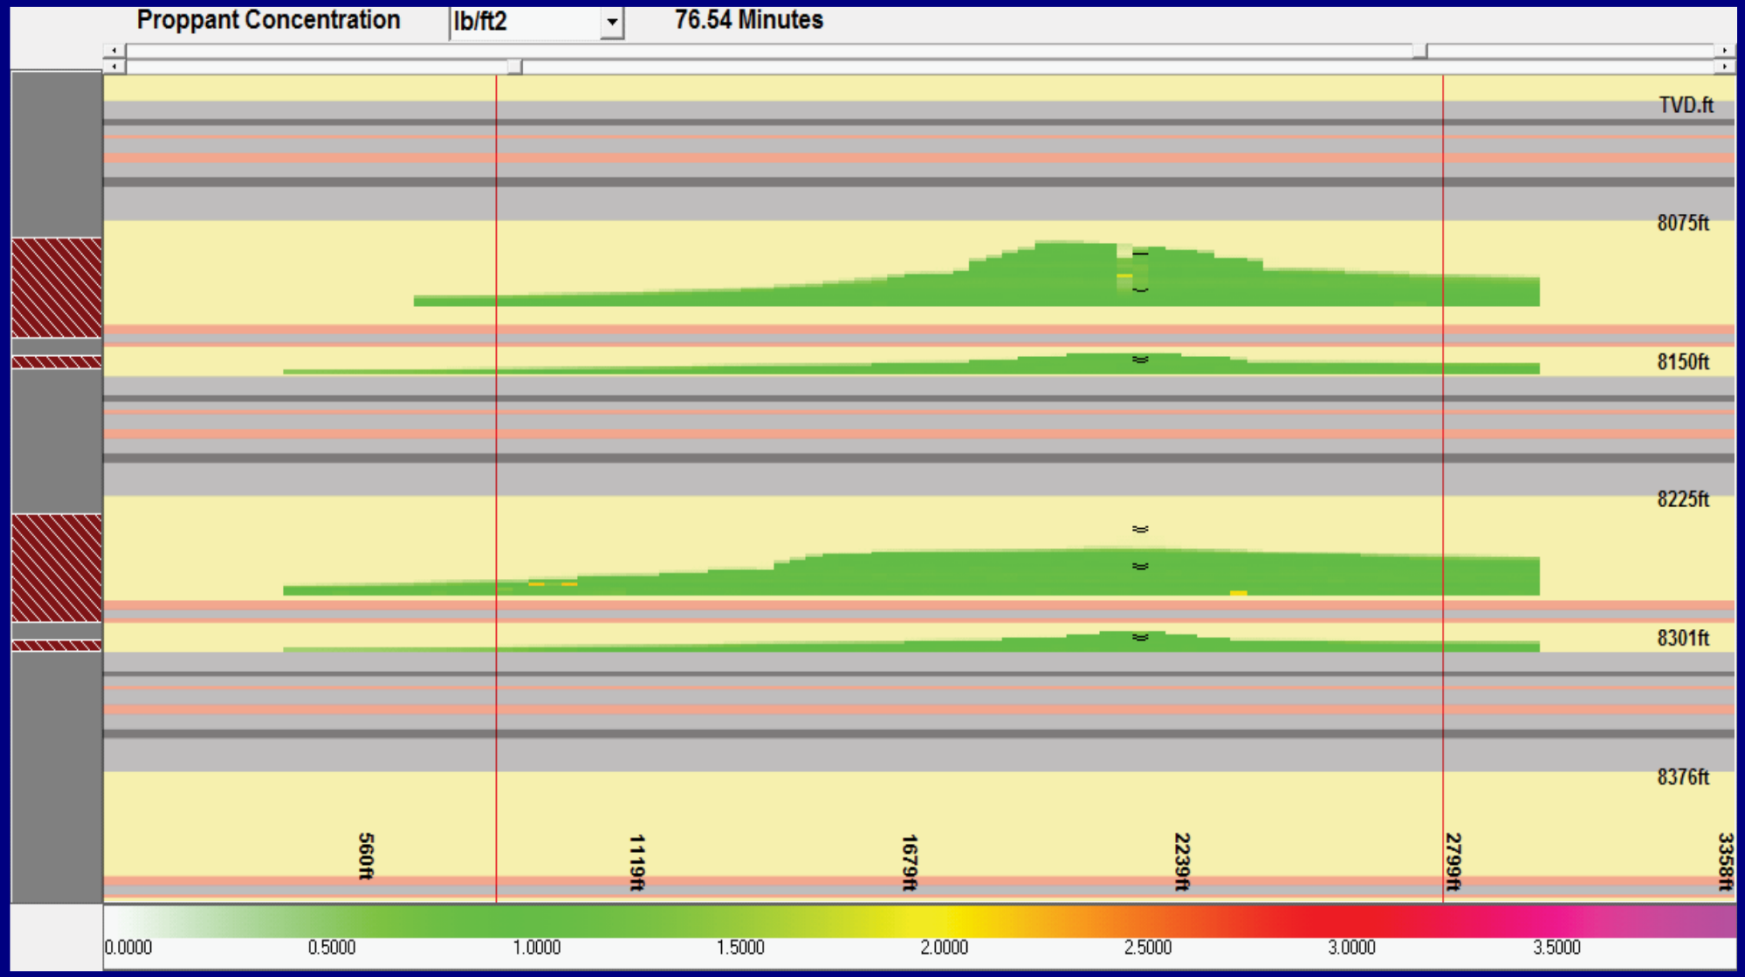

From Cuba, et al, 2013

Detailed Reservoir, Well A

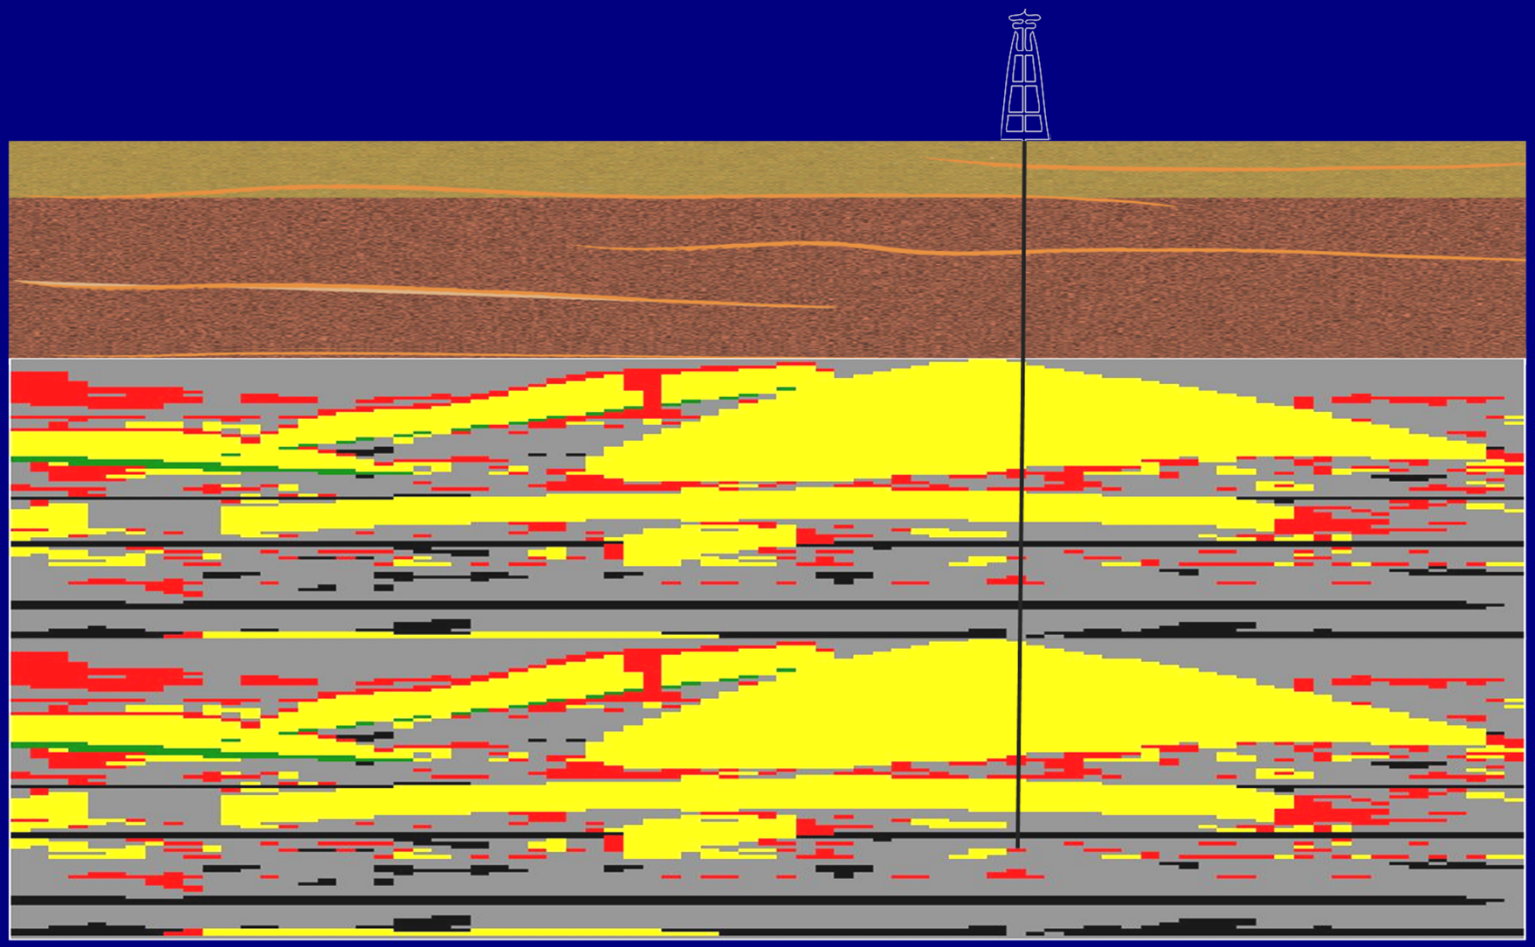

From Cuba, et al, 2013

Well A - Rock Properties

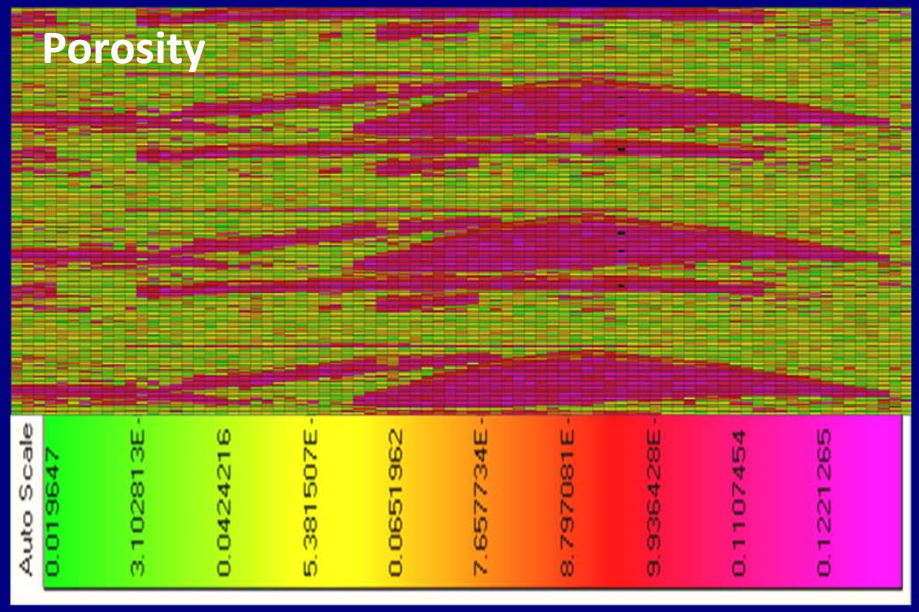

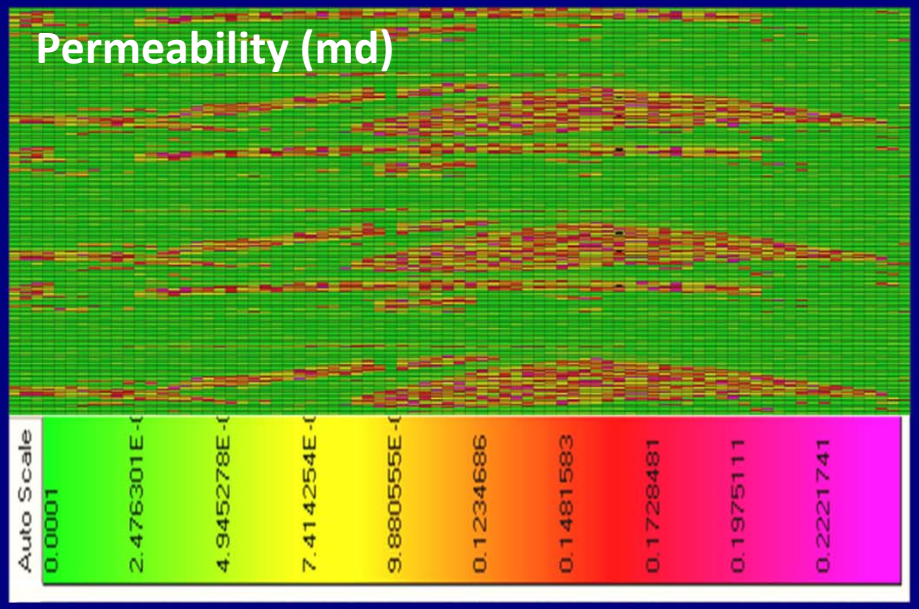

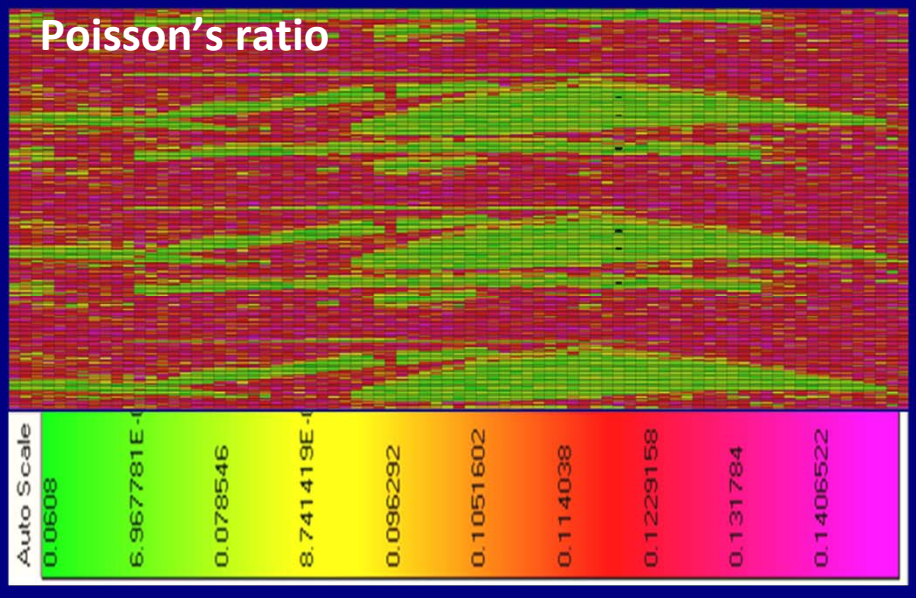

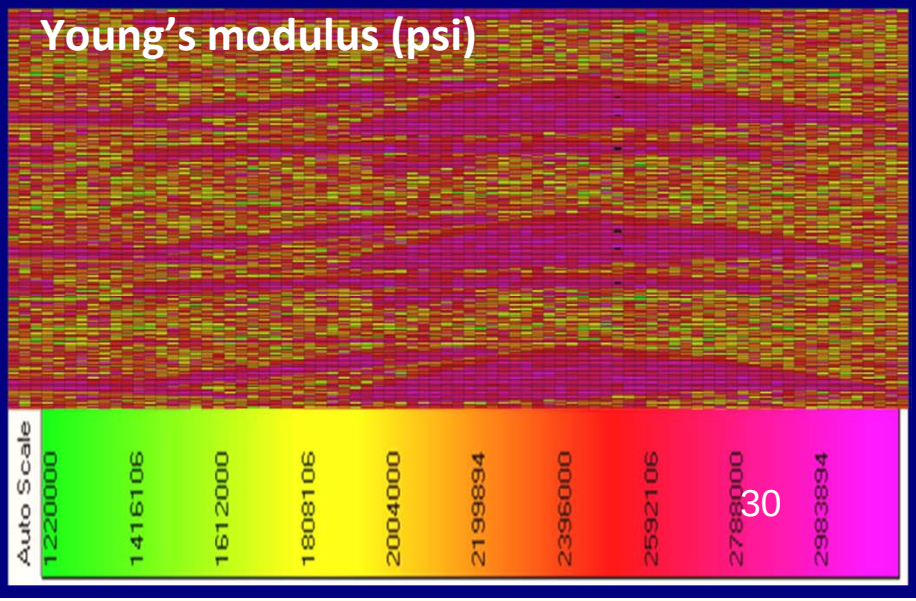

Detailed Reservoir, Well A

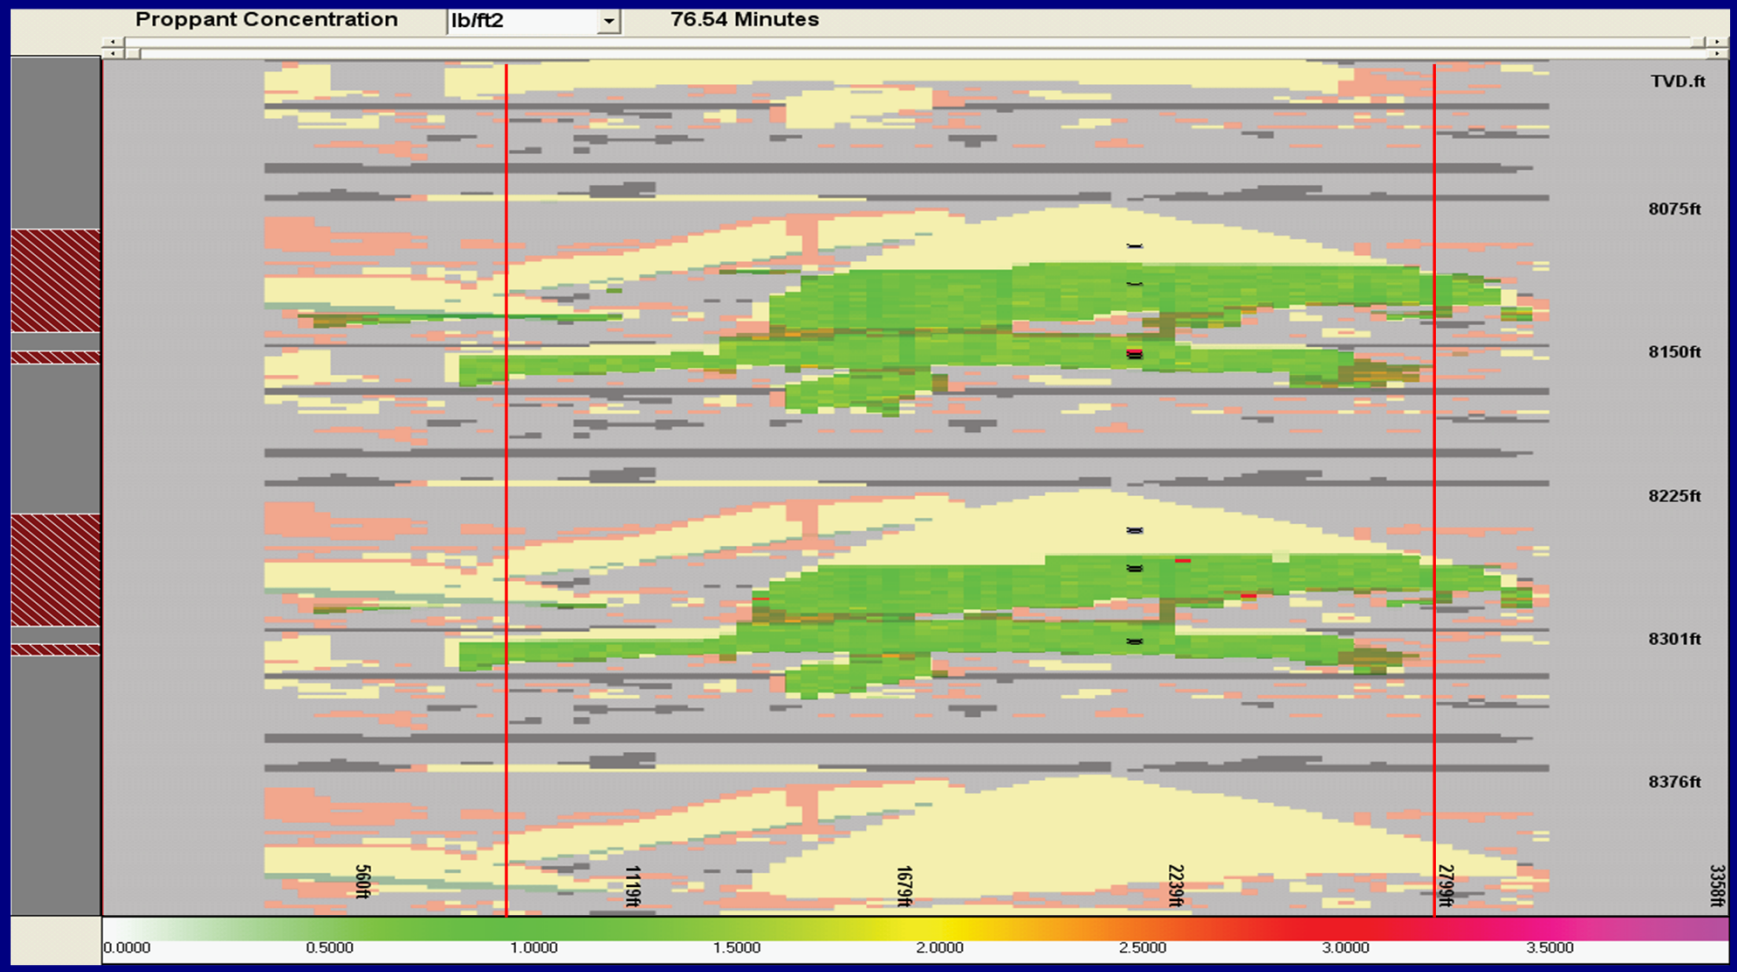

From Cuba, et al, 2013

Reservoir Management/Development

- Reservoir characterization
- Well spacing
  - 10-20 acres (4-8 hectares)
- Stage/cluster spacing
- Need to maximize contact area
  - Low permeability
  - Minimal drainage area
- Re-treatments

Cluster Spacing Optimization

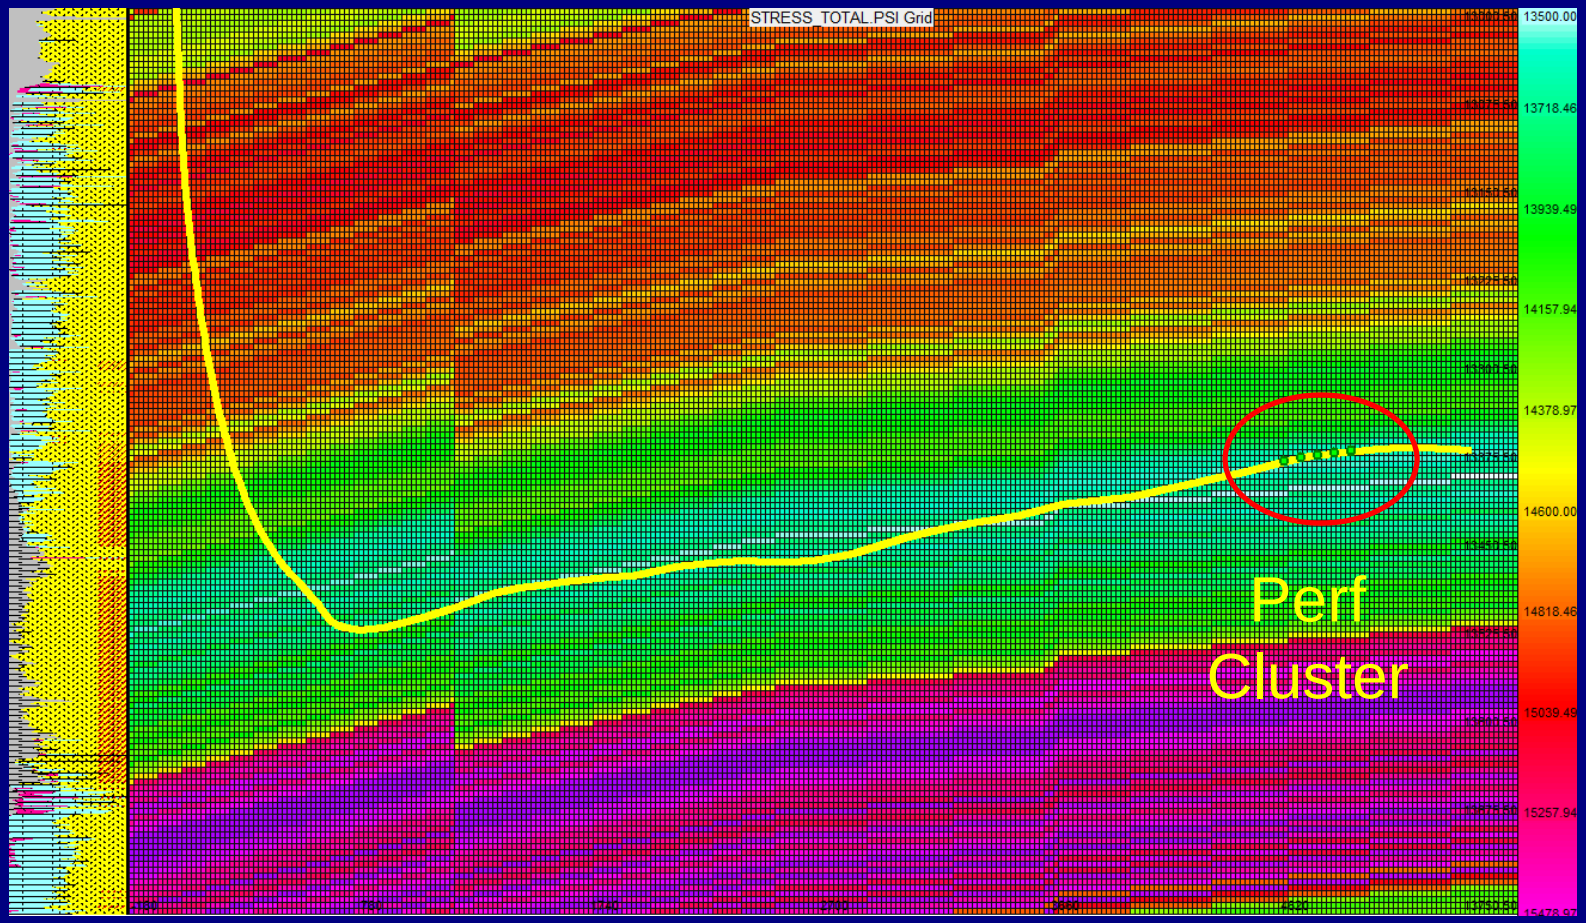

Stress Shadowing of Clusters

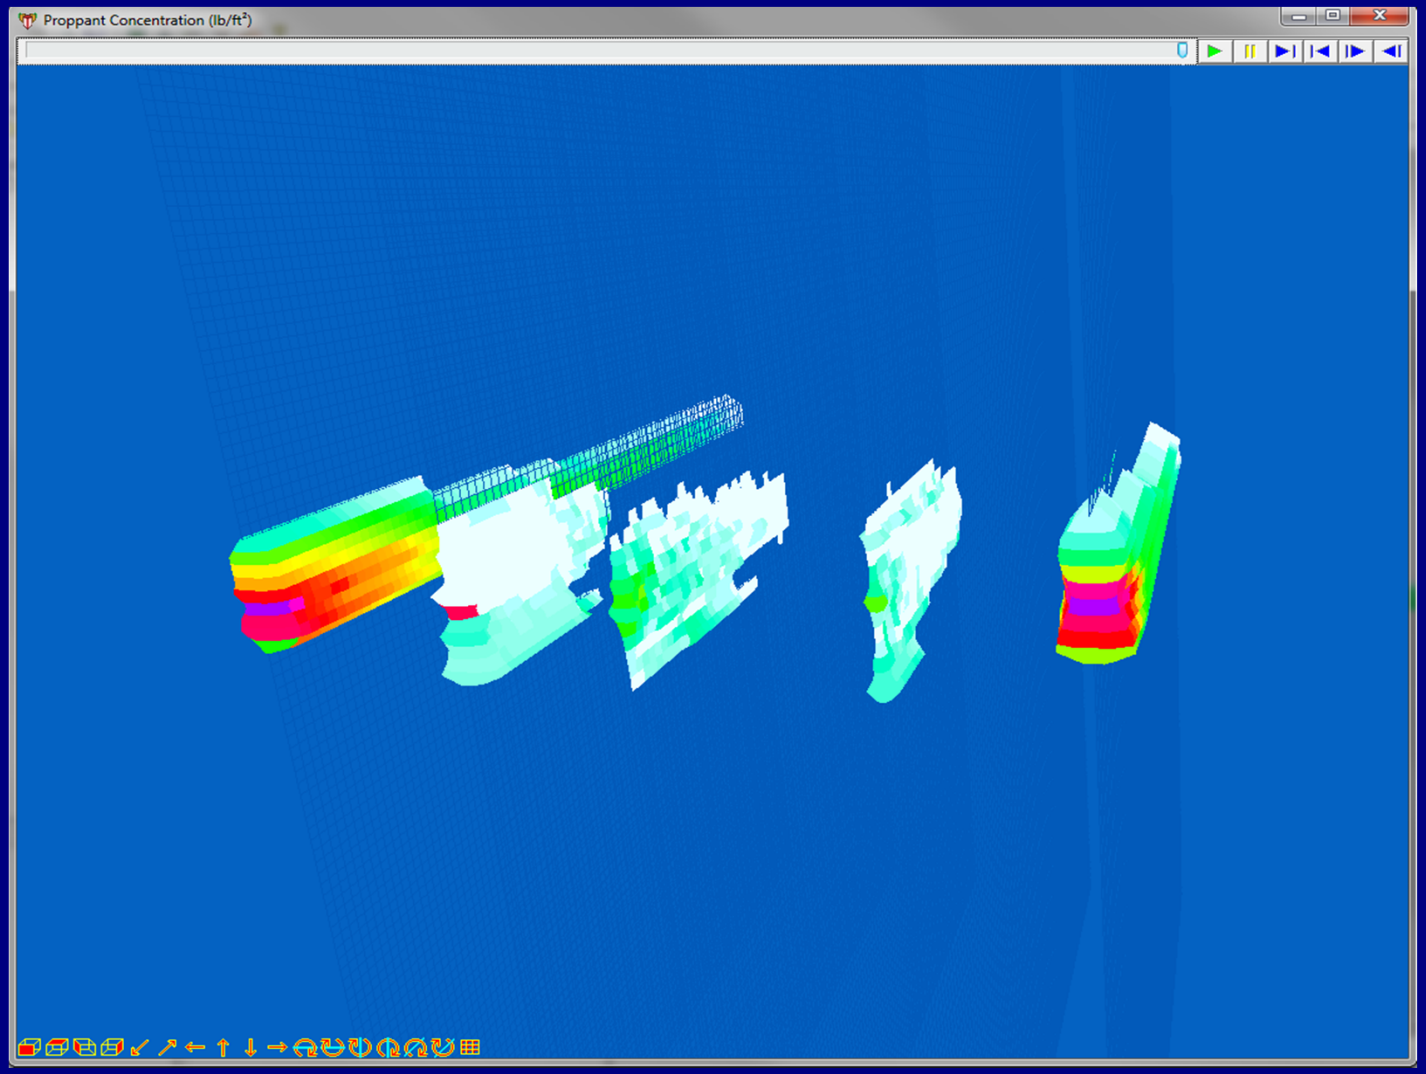

Reservoir Management/Development

- Reservoir characterization
- Well spacing
  - 10-20 acres (4-8 hectares)
- Stage/cluster spacing
- Need to maximize contact area
  - Low permeability
  - Minimal drainage area
- Re-treatments

Piceance Basin, Western Colorado, USA

“S-Curve” Development

From www.csug.ca, 2010

Pad Development

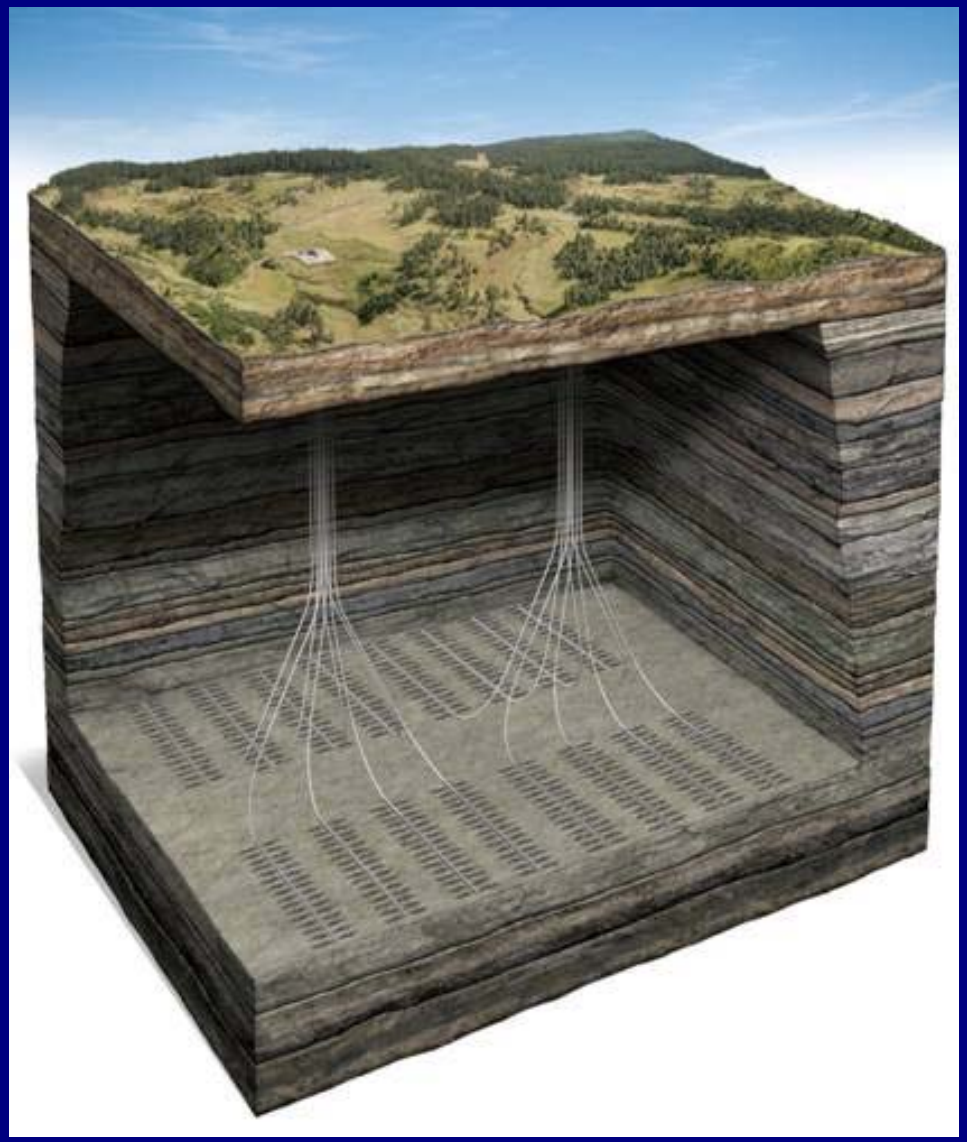

Courtesy of
PETROBAKKEN

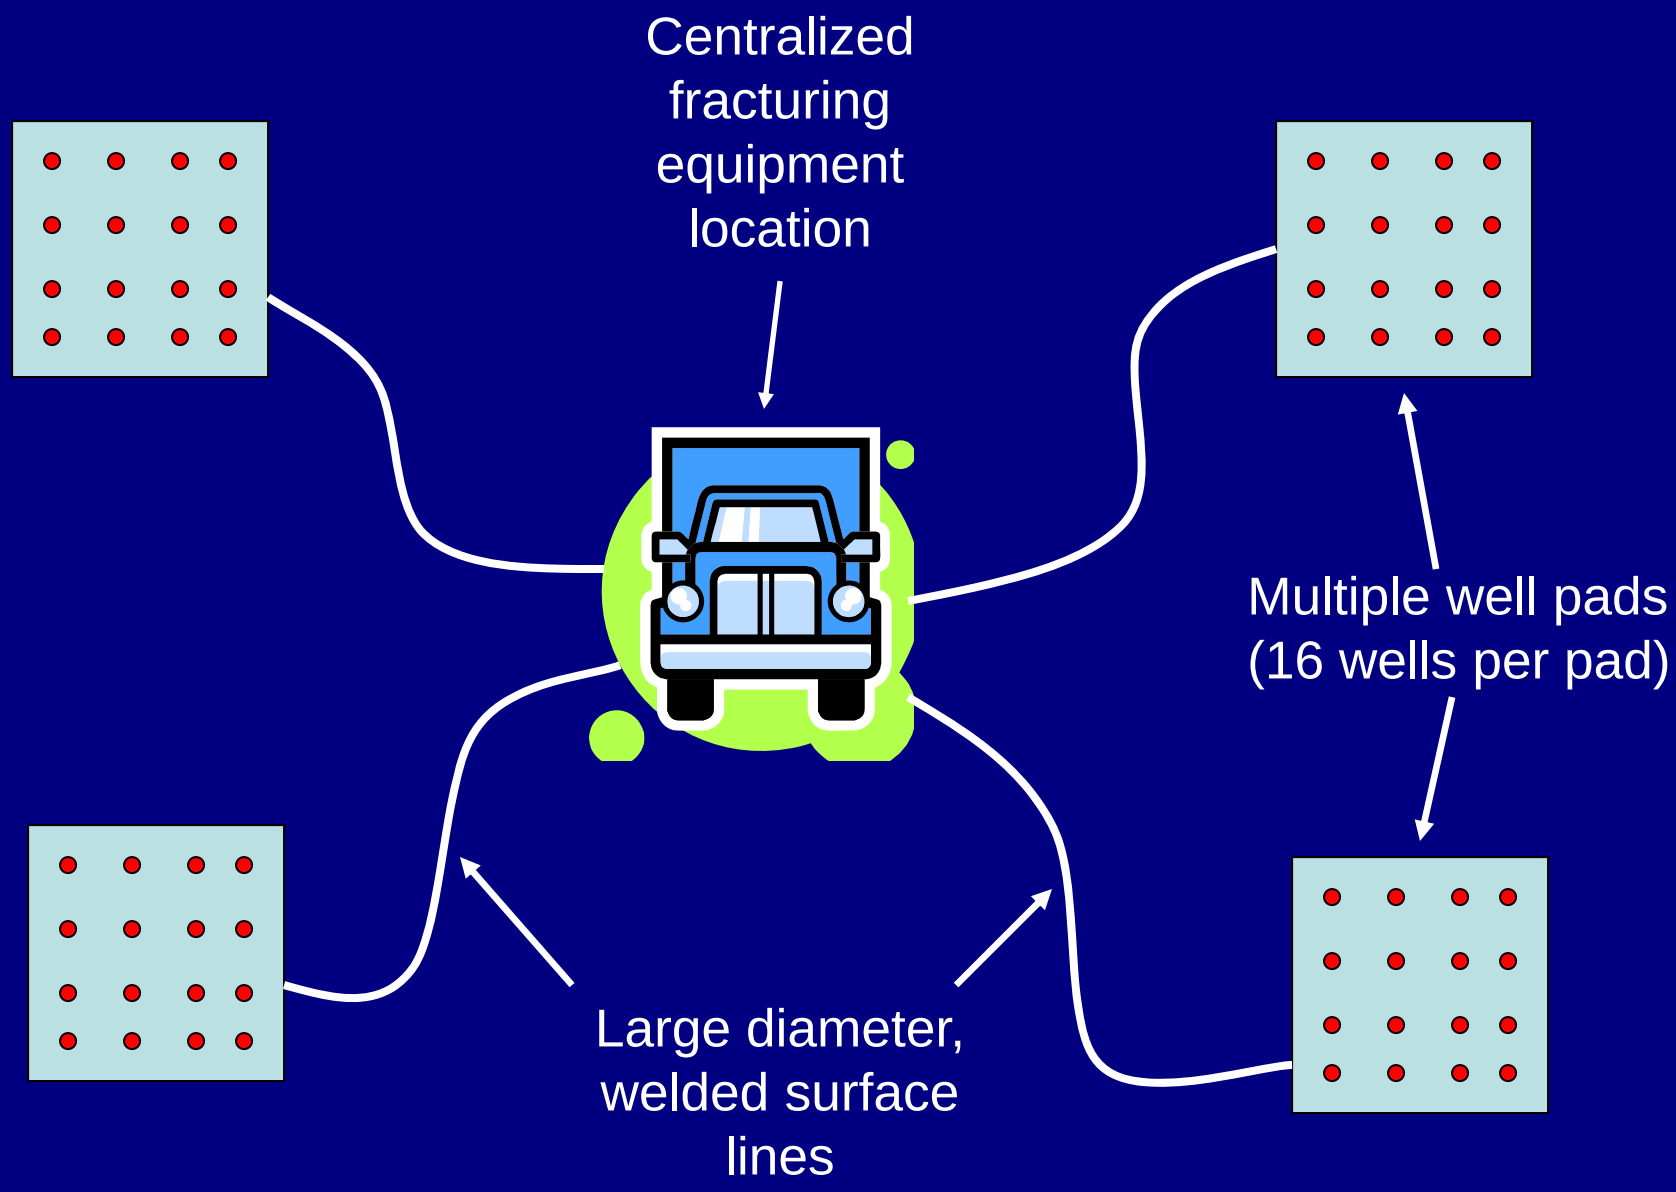

From Miskimins, 2009

Reservoir Management/Development

- Reservoir characterization
- Well spacing
  - 10-20 acres (4-8 hectares)
- Stage/cluster spacing
- Need to maximize contact area
  - Low permeability
  - Minimal drainage area
- Re-treatments

Reorientation/Retreatment??

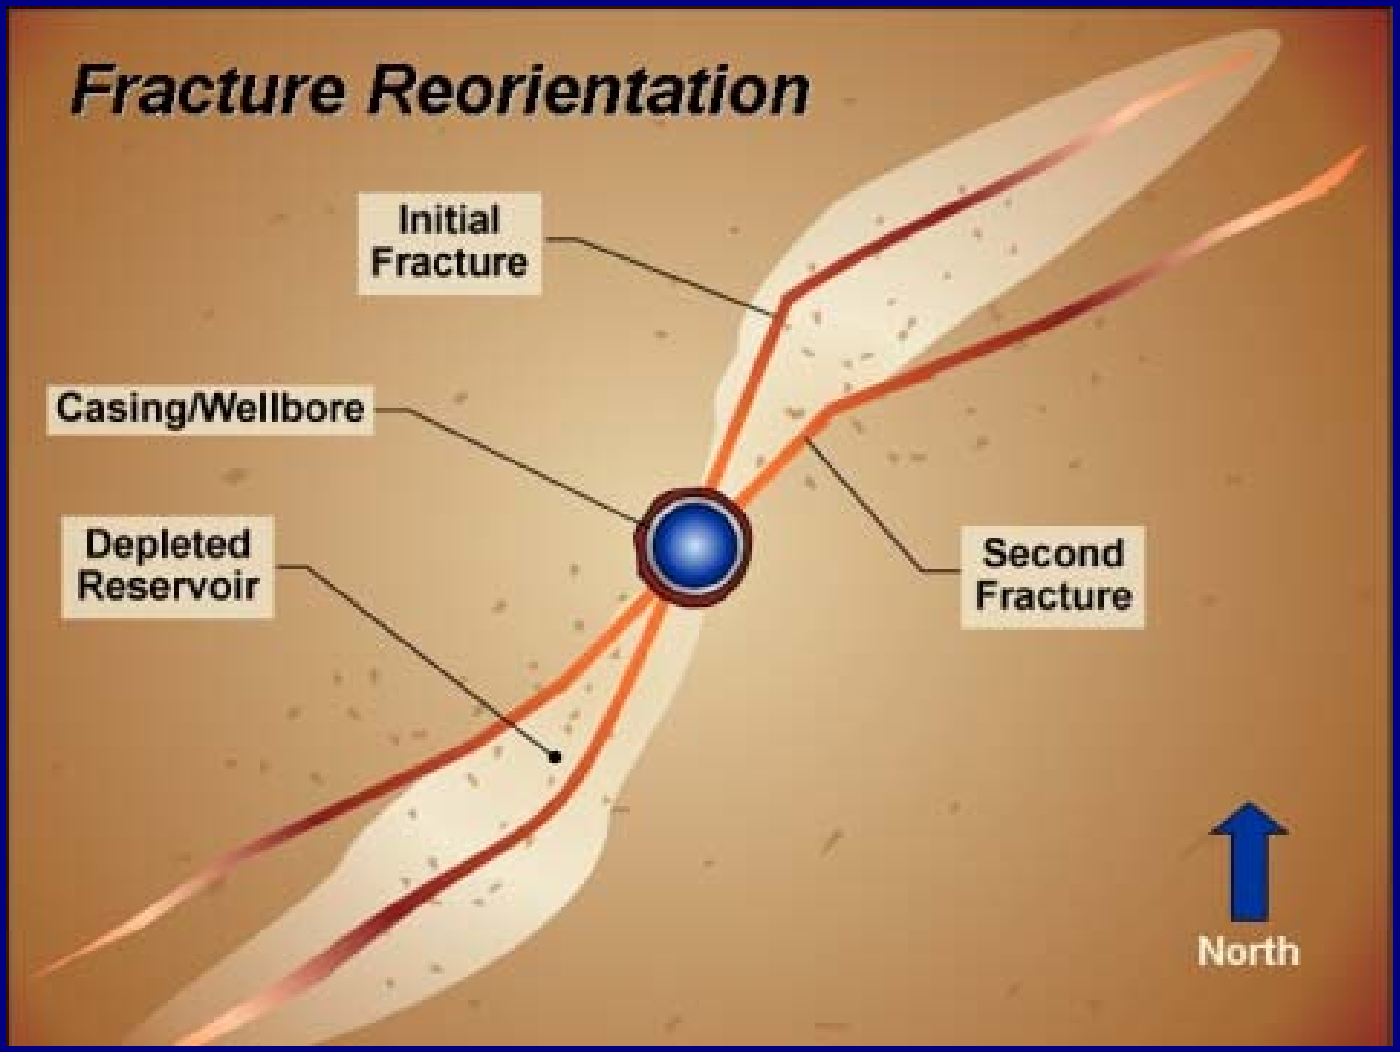

Courtesy Devon Energy

Conclusions

- Hydraulic fracturing for UCR's requires combinations of considerations
- UCR's represent a wide variety of reservoir types and designs must address these differences
  - Materials, complexity, reservoir management
- The learning curve can be shortened by studying other successful applications

Thank you for your time!

Distinguished Lecturer Program

Your Feedback is Important

Enter your section in the DL Evaluation Contest by completing the evaluation form for this presentation

http://www.spe.org/dl/

Society of Petroleum Engineers
Distinguished Lecturer Program
www.spe.org/dl